


PRODUCT RANGE

20
26

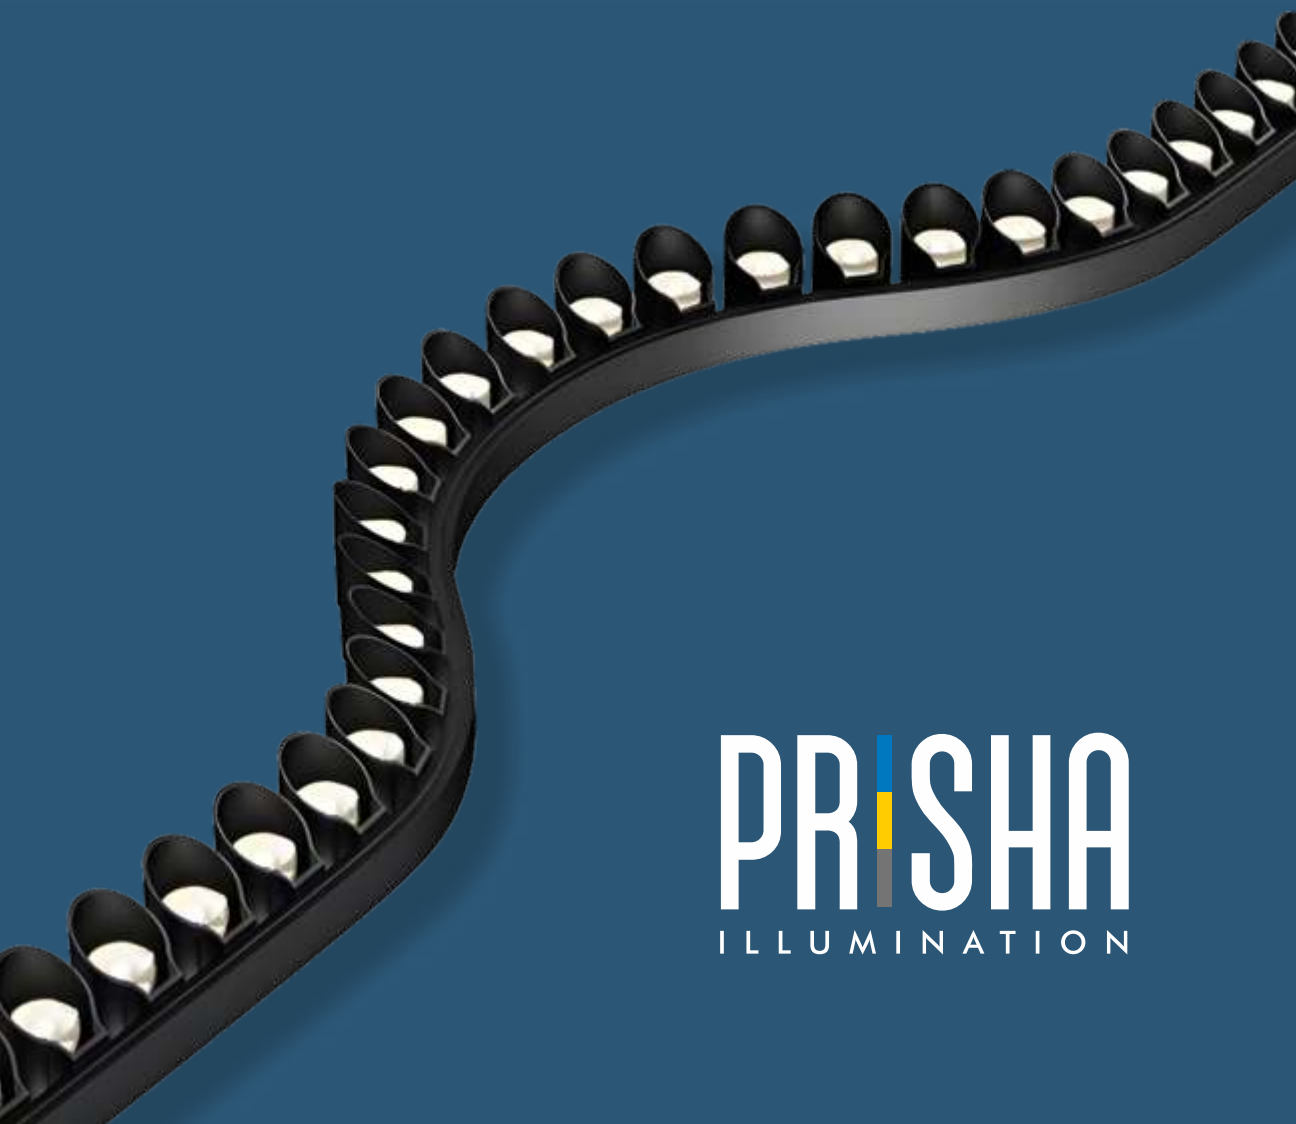

PRISHA
ILLUMINATION

WE DESIGN

WE CUSTOMISE

WE PERFORM



LIGHTS THAT BRIGHTEN UP THE ROOM.

Isn't that what lights are supposed to do?

Prisha Illumination isn't just about lighting, it's about precision. The type of precision that allows the illuminated to embrace the space it shall cater to, built in with flexibility that allows the space to brighten up just right.

With over a decade of experience in the lighting industry, Prisha Illumination caters to its clientele with not only the most premium fixtures but with a niche retail experience, that sets the brand apart. The retail experience is a well thought avenue to allow and initiate interaction with clients and end users, consultants, architects & designers, that empowers Prisha Illumination to build a formidable range of lighting fixtures that answers to today's lighting needs as well as desires.

Immaculately coated, well designed aluminum heat sinks for heat dissipation, acceptable CRI standards especially for retail, and most importantly 'flexibility', are some of the aspects that Prisha Illumination emphasizes on while working on the fixture designs through quality make & fit.

Considering LED has stormed the market in form of energy efficiency, lamps and fixtures, for Prisha Illumination environmental viability and optimum efficiency play an important role in the make & fit, and a conscious decision to maintain the same has been taken in manufacturing the ranges.

PRIVE INDOOR

(PREMIUM ARCHITECTURAL RANGE)



Premium and a top line series of PRISHA, PRIVE as a collection comprises of high quality luminaires with better technical abilities

Page 1 to 29

PRIME INDOOR

(PROJECT & ECO RANG)



Prime from Prisha is what is commonly referred to as an architectural range that performs both functionally as well as one that uses it's fixturing to maximise lighting output aesthetics.

Page 30 to 59

PRIVE OUTDOOR

(PREMIUM ARCHITECTURAL RANGE)

Premium and a top line series of PRISHA, PRIVE as a collection comprises of high quality luminaires with better technical abilities

Page 60 to 73



PRIME OUTDOOR

(PROJECT & ECO RANG)

Prime from Prisha is what is commonly referred to as an architectural range that performs both functionally as well as one that uses it's fixturing to maximise lighting output aesthetics.

Page 74 to 102

Fundamental of Lighting - Part 1

Lighting Types

Understanding Diverse Applications

Ambient Lighting

Provides general illumination for an entire area, acting as the primary light source. Examples include ceiling-mounted fixtures and recessed lights.

Task Lighting

Offers focused illumination for specific activities like reading, cooking, or working. Desk lamps, under-cabinet lights, and adjustable floor lamps are common examples.

Accent Lighting

Highlights specific objects, architectural features, or areas, adding depth and drama. Utilises spotlights on artwork, wall grazers, or narrow beam luminaires.

Decorative Lighting

Primarily aesthetic, these fixtures contribute to the room's design rather than just providing light. Chandeliers, pendant lights, and sconces fall into this category.

Natural Lighting

Refers to daylight or sunlight entering a space through windows, skylights, or doors. Maximising natural light can reduce energy consumption and enhance well-being.

Colour Characteristics

Decoding CCT and CRI

Correlated Colour Temperature (CCT)

CCT describes the colour appearance of light, measured in Kelvin (K). Lower values (2700K-3000K) : Emit a warm white light with a yellowish hue, ideal for creating cosy and inviting atmospheres in residential or hospitality settings. Higher values (5000K-6500K): Produce a cool white or daylight appearance, often with a bluish tint, preferred for commercial spaces, offices, or areas requiring high alertness and visual clarity.

Colour Rendering Index (CRI)

CRI measures how accurately a light source displays colours compared to natural light, on a scale of 0-100. 80+ CRI: Considered good for general applications, ensuring reasonable colour accuracy. 90+ CRI: Essential for tasks requiring precise colour rendition, such as retail displays, art galleries, or medical facilities, as it renders colours vibrantly and faithfully.

PRIVE INDOOR SERIES




Available in : • CCT T & D • DT6 • DT8

PRODUCT DESCRIPTION


PRODUCT

FINISH & MATERIAL : MATT BLACK & ALUMINIUM
MOUNTING : SURFACE
DIMENSION : 24 x 51 x 1000

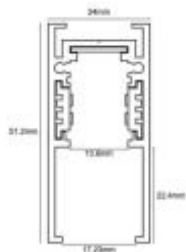


PL15 - S1000

FINISH & MATERIAL : MATT BLACK & ALUMINIUM
MOUNTING : SURFACE
DIMENSION : 24 x 51 x 2000




PL15 - S2000

FINISH & MATERIAL : MATT BLACK & ALUMINIUM
MOUNTING : RECESSED
DIMENSION : 60 x 51 x 1000
CUT-OUT : 24MM



PL15 - R1000

FINISH & MATERIAL : MATT BLACK & ALUMINIUM
MOUNTING : RECESSED
DIMENSION : 60 x 51 x 2000
CUT-OUT : 24MM



PL15 - R2000

PRODUCT DESCRIPTION

PRODUCT

PL15 - M1



Hanging Accessories

PL15 - M2 (4 Wire)



Power Cord

PL15 - M3



Corner Connector

PL15 - M4



Straight Connector

PL15 - M5



Track Joiner Plate

PL15 - M6



Surface Joiner (L)

PL15 - M7



Recessed Joiner (L)

PL15 - M8



Ceiling to Wall Recessed Joiner

PL15 - 80W - 48V (2 Wires)

L : 260 MM
W : 15 MM



Power Supply (Driver)

PL15 - 150W - 48V (2 Wires/4 Wires)

L : 300 MM
W : 15 MM



Power Supply (Driver)

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 6W ●
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K (LINE TWO AVAILABLE)
CRI	: ≥ 90
DIMENSION	: L118 x W15 x H42
LUMENS	: 600Lm
POWERED BY	: OSRAM
INPUT	: 48V DRIVER



PL15 - A1

WATTS	: 12W ● ● ●
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K (LINE TWO AVAILABLE)
CRI	: ≥ 90
DIMENSION	: L232 x W15 x H42
LUMENS	: 1200Lm
POWERED BY	: OSRAM
INPUT	: 48V DRIVER



PL15 - A2

WATTS	: 10W ● ● ●
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K (LINE TWO AVAILABLE)
CRI	: ≥ 90
DIMENSION	: L300 x W15 x H22
LUMENS	: 900Lm
POWERED BY	: OSRAM
INPUT	: 48V DRIVER



PL15 - A3

WATTS	: 20W ● ● ●
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K (LINE TWO AVAILABLE)
CRI	: ≥ 90
DIMENSION	: L600 x W15 x H25
LUMENS	: 1800Lm
POWERED BY	: OSRAM
INPUT	: 48V DRIVER



PL15 - A4

WATTS	: 7W ●
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K (LINE TWO AVAILABLE)
CRI	: ≥ 90
DIMENSION	: Ø 35 x 80
LUMENS	: 770Lm
POWERED BY	: BRIDGELUX
INPUT	: 48V DRIVER



PL15 - A5

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 12W	● ● ●
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K, 4000K (LINE TWO AVAILABLE)	
CRI	: ≥ 90	
DIMENSION	: Ø 45 x 100	
LUMENS	: 1320Lm	
POWERED BY	: BRIDGELUX	
INPUT	: 48V DRIVER	



PL15 - A6

WATTS	: 6W	●
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K (LINE TWO AVAILABLE)	
CRI	: ≥ 90	
DIMENSION	: L118 x W15 x H100	
LUMENS	: 600Lm	
POWERED BY	: OSRAM	
INPUT	: 48V DRIVER	



PL15 - A7

WATTS	: 12W	● ● ●
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K (LINE TWO AVAILABLE)	
CRI	: ≥ 90	
DIMENSION	: L232 x W15 x H100	
LUMENS	: 1200Lm	
POWERED BY	: OSRAM	
INPUT	: 48V DRIVER	



PL15 - A8

WATTS	: 7W	
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K, 4000K (LINE TWO AVAILABLE)	
CRI	: ≥ 90	
DIMENSION	: Ø 25 x 300	
LUMENS	: 700Lm	
POWERED BY	: BRIDGLUX	
INPUT	: 48V DRIVER	



PL15 - A9

WATTS	: 22W	
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM	
BEAM ANGLE	: 120°	
CCT(K)	: 3000K, 4000K (LINE TWO AVAILABLE)	
CRI	: ≥ 90	
DIMENSION	: Ø 27 x 600	
LUMENS	: 1980Lm	
POWERED BY	: OSRAM	
INPUT	: 48V DRIVER	



PL15 - A10

PRODUCT DESCRIPTION**PRODUCT**

MOUNTING : SURFACE MOUNTED
FINISH : SAND BLACK
DIMENSION : 455 X 15 X 15 MM
IP : IP20

POWER SUPPLY (DRIVER-24V) NOT INCLUDED



PRR COCK 1

MOUNTING : SURFACE MOUNTED
FINISH : SAND BLACK
DIMENSION : 955 X 15 X 15 MM
IP : IP20

POWER SUPPLY (DRIVER-24V) NOT INCLUDED



PRR COCK 2

MOUNTING : BUCKLE
FINISH : ALLUMINIUM + PC
DIMENSION : 55 X 12 X 12 MM
IP : IP20



**STRAIGHT CONNECTOR
(FOR COCK TRACK)**

MOUNTING : BUCKLE (USE IN SHOWCASE)
MATERIAL : PC
SENSOR : GESTURE CONTROL SENSOR
IP : IP20
DIMENSION : 64 X 10 X 12 MM



PRR SENSE 1

MOUNTING : BUCKLE (USE IN WARDROBE)
MATERIAL : PC
SENSOR : DOOR CONTROL SENSOR
IP : IP20
DIMENSION : 36 X 14 X 14 MM



PRR SENSE 2

PRODUCT DESCRIPTION


PRODUCT

WATTS	: 3W
FINISH & MATERIAL	: SAND BLACK ALUMINIUM + PC
BEAM ANGLE	: 24°
CCT(K)	: 3000K
CRI	: RA>80
LUMEN	: 240Lm
DIMENSION	: 28 X 50 X 55
MOUNTING	: BUCKLE
POWERED BY	: OSRAM




PRR TAIL 1

WATTS	: 6W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM + PC
BEAM ANGLE	: 90°
CCT(K)	: 3000K
CRI	: Ra>80
LUMEN	: 40LM
IP	: Ip20
DIMENSION	: 12x10x249MM
MOUNTING	: BUCKLE
POWERED BY	: BRIDGELUX SMD

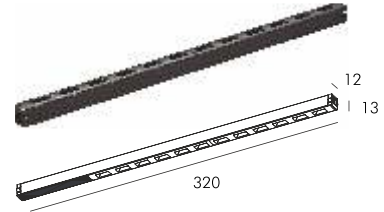

PRR TAIL 2 (NEW)

WATTS	: 5W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM + PC
BEAM ANGLE	: 120°
CCT(K)	: 3000K
CRI	: Ra>80
LUMEN	: 30LM
IP	: IP20
DIMENSION	: 12x10x249MM
MOUNTING	: BUCKLE
POWERED BY	: Bridgelux SMD



PRR TAIL 3 (NEW)

WATTS	: 5W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM + PC
BEAM ANGLE	: 120° + Ø10°
CCT(K)	: 3000K
CRI	: Ra>80
LUMEN	: 55LM
IP	: IP20
DIMENSION	: 20.5x15x249MM
MOUNTING	: BUCKLE
POWERED BY	: Bridgelux



PRR TAIL 4

WATTS	: 6 x 1.5 W = 9W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM + PC
BEAM ANGLE	: 30°
CCT(K)	: 3000K
CRI	: Ra>90
LUMEN	: 810LM
IP	: IP20
DIMENSION (Outer)	: 105 x 16 x 43 MM
DIMENSION (Inner)	: 79 x 12 x 15 MM
MOUNTING	: BUCKLE
POWERED BY	: Bridgelux



PRR TAIL 5



WATTS	: 5W
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 15-45° (Adjustable)
CCT(K)	: 3000K
LUMEN	: 400LM
IP	: IP20
DIMENSION	: 56 x 44 x 110MM
CUT-OUT	: 35MM
MOUNTING	: RECESSED
INPUT	: 24V Driver not Included
POWERED BY	: OSRAM


PRR CABY 1

WATTS	: 5W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15-45° (Adjustable)
CCT(K)	: 3000K
LUMEN	: 400LM
IP	: IP20
DIMENSION	: 99 x 56 x 233MM
MOUNTING	: RECESSED
INPUT	: 24V Driver not Included
POWERED BY	: OSRAM


PRR CABY 2

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 2W	 PRR CABY 3
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K, 4000K	
LUMEN	: 180LM	
IP	: IP20	
DIMENSION	: 56 x 44 x 27.5 MM	
CUT-OUT	: 35MM	
MOUNTING	: RECESSED	
INPUT	: 24V Driver not Included	
POWERED BY	: OSRAM	
WATTS	: 2W	 PRR CABY 4
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K, 4000K	
LUMEN	: 180LM	
IP	: IP20	
DIMENSION	: D 34 x 16 MM	
MOUNTING	: SURFACE	
INPUT	: 24V Driver not Included	
POWERED BY	: OSRAM	
WATTS	: 10W	 PRE FLOCK 1B
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM	
BEAM ANGLE	: 38°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 85	
DIMENSION	: Ø 48 X H 120 MM	
LUMENS	: 1050Lm	
POWERED BY	: BRIDGELUX	
WATTS	: 25W	 PRR WASH 1B
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM	
BEAM ANGLE	: 10° V x 65° H	
CCT(K)	: 3000K	
CRI	: Ra>90	
LUMEN	: 2500LM	
IP	: IP20	
DIMENSION	: 643 x 92 x 72 MM	
MOUNTING	: RECESSED	
CUT-OUT	: 620 x 80 MM	
POWERED BY	: BRIDGELUX	
WATTS	: 25W	 PRR WASH 2B
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM	
BEAM ANGLE	: 10° V x 65° H	
CCT(K)	: 3000K	
CRI	: Ra>90	
LUMEN	: 2500LM	
IP	: IP20	
DIMENSION	: 643 x 38 x 71 MM	
MOUNTING	: SURFACE	
POWERED BY	: BRIDGELUX	

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 35W
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM
COVERAGE	: 3 MTR. X 7 MTR.
CCT(K)	: 3000K
CRI	: Ra>90
LUMEN	: 3500LM
IP	: IP20
DIMENSION	: 186 x 60 x 178 MM
MOUNTING	: SURFACE
POWERED BY	: BRIDGELUX



PRR WASHER

WATTS	: 3W
FINISH & MATERIAL	: MATT WHITE
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 20 X H 71 MM
CUT-OUT	: Ø 18 MM
LUMENS	: 270Lm
POWER FACTOR	: ≥ 0.5
POWERED BY	: BRIDGELUX



PRR FLASH 1A

WATTS	: 3W
FINISH & MATERIAL	: MATT BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 20 X H 71 MM
CUT-OUT	: Ø 18 MM
LUMENS	: 270Lm
POWER FACTOR	: ≥ 0.5
POWERED BY	: BRIDGELUX



PRR FLASH 1B

WATTS	: 3W
FINISH & MATERIAL	: NICKEL BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 20 X H 71 MM
CUT-OUT	: Ø 18 MM
LUMENS	: 270Lm
POWER FACTOR	: ≥ 0.5
POWERED BY	: BRIDGELUX




PRR FLASH 1C

WATTS	: 5W
FINISH & MATERIAL	: MATT WHITE
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 29 X H 63 MM
CUT-OUT	: Ø 25 MM
LUMENS	: 450Lm
POWER FACTOR	: ≥ 0.5
POWERED BY	: BRIDGELUX



PRR FLASH 2A

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 5W	 PRR FLASH 2B
FINISH & MATERIAL	: MATT BLACK	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 29 X H 63 MM	
CUT-OUT	: Ø 25 MM	
LUMENS	: 450Lm	
POWER FACTOR	: ≥ 0.5	
POWERED BY	: BRIDGELUX	
WATTS	: 5W	 PRR FLASH 2C
FINISH & MATERIAL	: NICKEL BLACK	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 29 X H 63 MM	
CUT-OUT	: Ø 25 MM	
LUMENS	: 450Lm	
POWER FACTOR	: ≥ 0.5	
POWERED BY	: BRIDGELUX	
WATTS	: 7W	 PRR GLASSO
MATERIAL	: SAND WHITE + SMOKY GREY GLASS	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K	
CRI	: ≥ 90	
DIMENSION	: 42 x 103 H MM	
GLASS DIMENSION	: 30 x 41 MM	
CUT-OUT	: Ø 35 MM	
LUMENS	: 630Lm	
WATTS	: 6W ● ● ●	 PRR WESTOR 1A
FINISH & MATERIAL	: MATT WHITE + ALUMINIUM	
REFLECTOR	: NICKEL BLACK / WHITE / BLACK / CHROME / FRENCH GOLD (GLARELESS)	
BEAM ANGLE	: 15° / 24° / 36° / 50°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 50 X H 65 MM	
CUT-OUT	: Ø 45 MM	
LUMENS	: 750Lm	
POWERED BY	: LUMINUS	
USP	: FRONT OPENABLE	
WATTS	: 6W ● ● ●	 PRR WESTOR 1B
FINISH & MATERIAL	: MATT BLACK + ALUMINIUM	
REFLECTOR	: NICKEL BLACK / WHITE / BLACK / CHROME / FRENCH GOLD (GLARELESS)	
BEAM ANGLE	: 15° / 24° / 36° / 50°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 50 X H 65 MM	
CUT-OUT	: Ø 45 MM	
LUMENS	: 750Lm	
POWERED BY	: LUMINUS	
USP	: FRONT OPENABLE	

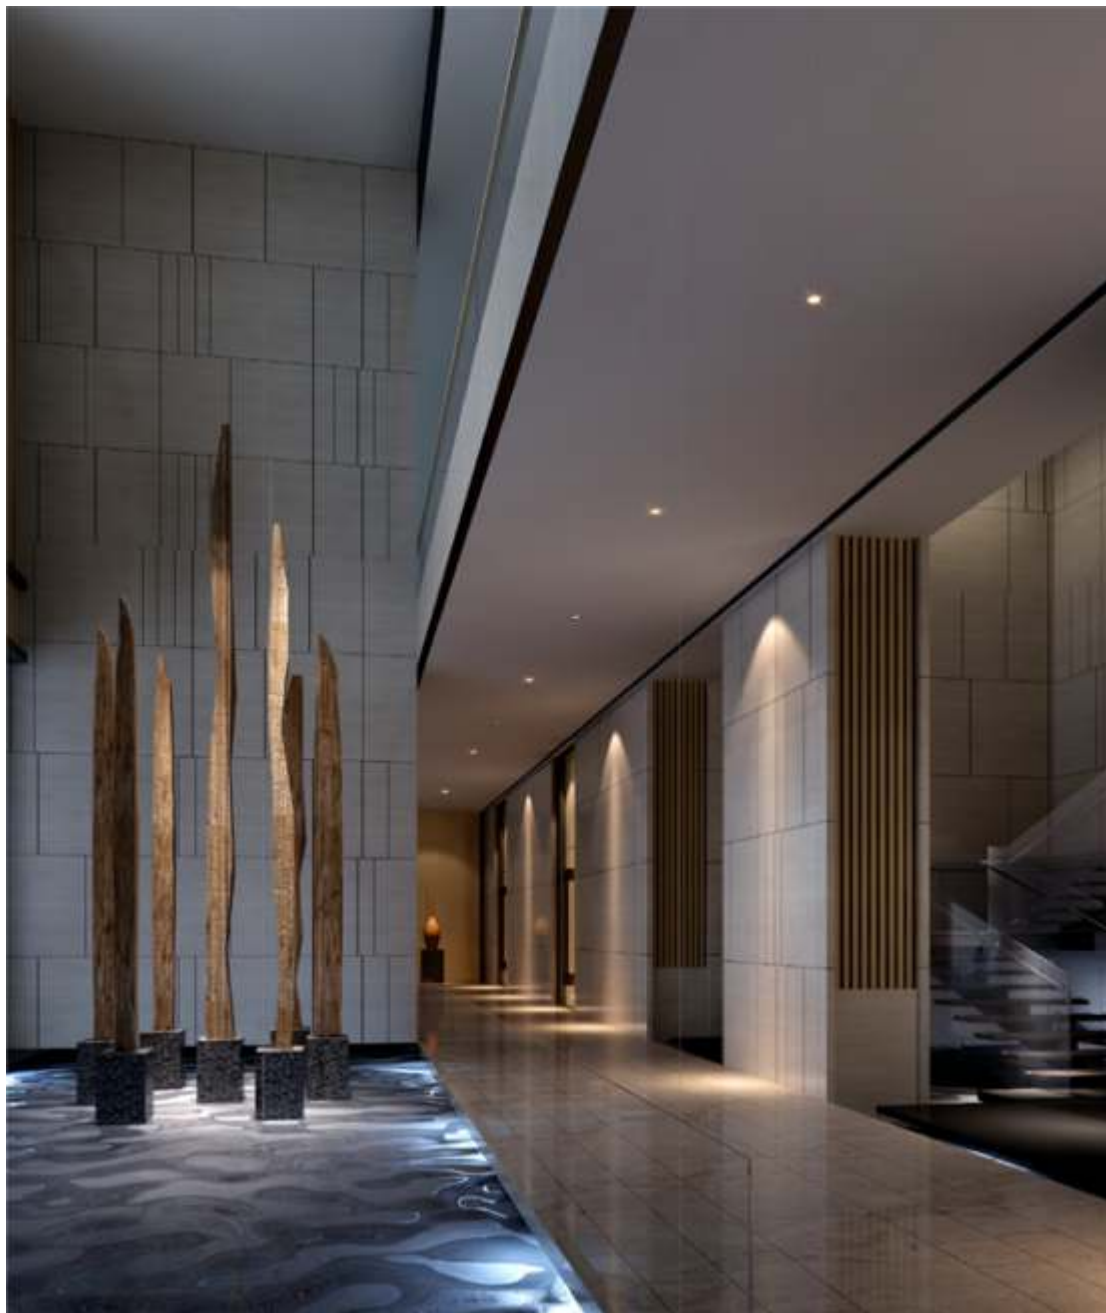

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 10W ● ● ●	 PRR WESTOR 2A
FINISH & MATERIAL	: MATT WHITE + ALUMINIUM	
REFLECTOR	: NICKEL BLACK / WHITE / BLACK / CHROME / FRENCH GOLD (GLARELESS)	
BEAM ANGLE	: 15° / 24° / 36° / 50°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 50 X H 105 MM	
CUT-OUT	: Ø 45 MM	
LUMENS	: 1250Lm	
POWERED BY	: LUMINUS	
USP	: FRONT OPENABLE	
WATTS	: 10W ● ● ●	 PRR WESTOR 2B
FINISH & MATERIAL	: MATT BLACK + ALUMINIUM	
REFLECTOR	: NICKEL BLACK / WHITE / BLACK / CHROME / FRENCH GOLD (GLARELESS)	
BEAM ANGLE	: 15° / 24° / 36° / 50°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 50 X H 105 MM	
CUT-OUT	: Ø 45 MM	
LUMENS	: 1250Lm	
POWERED BY	: LUMINUS	
USP	: FRONT OPENABLE	
PRR CARTER 1A (WHITE)		PRR CARTER 1B (BLACK)
 Included with WESTOR 1A & 2A		 Included with WESTOR 1B & 2B
DIMENSION : Ø 50 X H 18 MM CUT-OUT : Ø 45 MM		DIMENSION : Ø 50 X H 18 MM CUT-OUT : Ø 45 MM
PRR CARTER 2A (WHITE)		PRR CARTER 2B (BLACK)
		
DIMENSION : Ø 60 X H 18 MM CUT-OUT : Ø 55 MM		DIMENSION : Ø 60 X H 18 MM CUT-OUT : Ø 55 MM
PRR CARTER 3A (TRIMLESS)		PRR CARTER 3B (TRIMLESS)
		
DIMENSION : Ø 60 X H 10 MM CUT-OUT : Ø 45 MM		DIMENSION : Ø 60 X H 10 MM CUT-OUT : Ø 45 MM

PRODUCT DESCRIPTION
PRODUCT
PRR CARTER 4A (WHITE)


DIMENSION : 60 X 60 X H 17 MM
CUT-OUT : 55 X 55 MM

PRR CARTER 4B (BLACK)


DIMENSION : 60 X 60 X H 17 MM
CUT-OUT : 55 X 55 MM

PRR CARTER 5A (WHITE)


DIMENSION : 112 X 61 X H 25 MM
CUT-OUT : 105 X 55 MM

PRR CARTER 5B (BLACK)


DIMENSION : 112 X 61 X H 25 MM
CUT-OUT : 105 X 55 MM

PRR CARTER 6A (WHITE)


DIMENSION : 162 X 61 X H 25 MM
CUT-OUT : 105 X 55 MM

PRR CARTER 6B (BLACK)


DIMENSION : 162 X 61 X H 25 MM
CUT-OUT : 105 X 55 MM

PRR CARTER 7A (WHITE)


DIMENSION : 112 X 112 X H 25 MM
CUT-OUT : 105 X 105 MM

PRR CARTER 7B (BLACK)


DIMENSION : 112 X 112 X H 25 MM
CUT-OUT : 105 X 105 MM

PRR CARTER 8A (WHITE)


DIMENSION : 262 X 61 X H 25 MM
CUT-OUT : 205 X 55 MM

PRR CARTER 8B (BLACK)


DIMENSION : 262 X 61 X H 25 MM
CUT-OUT : 205 X 55 MM

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 15W	● ● ●
FINISH & MATERIAL	: MATT WHITE + ALUMINIUM	
REFLECTOR	: NICKEL BLACK / WHITE / BLACK	
BEAM ANGLE	: 24° / 36° / 50°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 61 X H 125 MM	
CUT-OUT	: Ø 55 MM	
LUMENS	: 1875Lm	
POWERED BY	: LUMINUS	



PRR EASTER 1A

WATTS	: 15W	● ● ●
FINISH & MATERIAL	: MATT BLACK + ALUMINIUM	
REFLECTOR	: NICKEL BLACK / WHITE / BLACK	
BEAM ANGLE	: 24° / 36° / 50°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 61 X H 125 MM	
CUT-OUT	: Ø 55 MM	
LUMENS	: 1875Lm	
POWERED BY	: LUMINUS	



PRR EASTER 1B

WATTS	: 15W	● ● ●
FINISH & MATERIAL	: MATT WHITE + ALUMINIUM	
BEAM ANGLE	: 24° / 36° / 50°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 61 X H 125 MM	
CUT-OUT	: Ø 55 MM	
LUMENS	: 1875Lm	
POWERED BY	: LUMINUS	



PRR CARBON 1A

WATTS	: 15W	● ● ●
FINISH & MATERIAL	: MATT BLACK + ALUMINIUM	
BEAM ANGLE	: 24° / 36° / 50°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 61 X H 125 MM	
CUT-OUT	: Ø 55 MM	
LUMENS	: 1875Lm	
POWERED BY	: LUMINUS	



PRR CARBON 1B

WATTS	: 25W	● ● ●
FINISH & MATERIAL	: MATT WHITE + ALUMINIUM	
REFLECTOR	: NICKEL BLACK	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 81 X H 145 MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 3125Lm	
POWERED BY	: LUMINUS	



PRR EASTER 2A

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 10W ● ● ●	 PRR GLEAM 1A
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
REFLECTOR	: SHINE BLACK / CHROME (GLARELESS)	
BEAM ANGLE	: 15° OR 36°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: 72 x 76 H MM	
CUT-OUT	: Ø 65 MM	
LUMENS	: 1200Lm	
POWERED BY	: CREE	
DRIVER(ON/OFF)	: FULHAM OR EQUIVALENT	
WATTS	: 10W ● ● ●	 PRR GLEAM 1B
FINISH & MATERIAL	: MATT BLACK & ALUMINIUM	
REFLECTOR	: SHINE BLACK / CHROME (GLARELESS)	
BEAM ANGLE	: 15° OR 36°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: 72 x 76 H MM	
CUT-OUT	: Ø 65 MM	
LUMENS	: 1200Lm	
POWERED BY	: CREE	
DRIVER(ON/OFF)	: FULHAM OR EQUIVALENT	
WATTS	: 15W ● ● ●	 PRR GLEAM 2A
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
REFLECTOR	: SHINE BLACK / CHROME (GLARELESS)	
BEAM ANGLE	: 15° OR 36°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: 88 x 88 H MM	
CUT-OUT	: Ø 80 MM	
LUMENS	: 1800Lm	
POWERED BY	: CREE	
DRIVER(ON/OFF)	: FULHAM OR EQUIVALENT	
WATTS	: 15W ● ● ●	 PRR GLEAM 2B
FINISH & MATERIAL	: MATT BLACK & ALUMINIUM	
REFLECTOR	: SHINE BLACK / CHROME (GLARELESS)	
BEAM ANGLE	: 15° OR 36°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: 88 x 88 H MM	
CUT-OUT	: Ø 80 MM	
LUMENS	: 1800Lm	
POWERED BY	: CREE	
DRIVER(ON/OFF)	: FULHAM OR EQUIVALENT	
WATTS	: 10W ● ● ●	 PRR GLASPEN 1A
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
REFLECTOR	: SHINE BLACK (GLARELESS)	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: 86 x 76 H MM	
CUT-OUT	: Ø 55 MM	
LUMENS	: 1200Lm	
POWERED BY	: CREE	
DRIVER(ON/OFF)	: FULHAM OR EQUIVALENT	

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 15W ● ● ●	 PRR GLASPEN 2A
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
REFLECTOR	: SHINE BLACK (GLARELESS)	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	 PRR GLOW 1A / 1B
DIMENSION	: 108 x 95 H MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 1200Lm	
POWERED BY DRIVER(ON/OFF)	: CREE FULHAM OR EQUIVALENT	
WATTS	: 8W Adjustable ● ● ●	 PRR GLOW 2A / 2B
MATERIAL	: MATT WHITE & BLACK & ALUMINIUM	
REFLECTOR	: MATT WHITE, MATT BLACK, CHROME & SHINE BLACK	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	 PRR GINI 1A
DIMENSION	: 82 x H 46 MM	
CUT-OUT	: Ø 75	
LUMENS	: 960Lm	
POWERED BY DRIVER(ON/OFF)	: CREE FULHAM OR EQUIVALENT	
WATTS	: 9W ● ● ●	 PRR GINI 1B
MATERIAL	: SAND WHITE + BLACK	
BEAM ANGLE	: 15° / 36°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: 44 x 90 H MM	 PRR GINI 1B
CUT-OUT	: Ø 40 MM	
LUMENS	: 960Lm	
POWERED BY DRIVER	: CREE BAG OR EQUIVALENT	
WATTS	: 9W ● ● ●	
MATERIAL	: SAND BLACK + BLACK	
BEAM ANGLE	: 15° / 36°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: 44 x 90 H MM	
CUT-OUT	: Ø 40 MM	
LUMENS	: 960Lm	
POWERED BY DRIVER	: CREE BAG OR EQUIVALENT	

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 10W ●
MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L 147 x W 45 x H 42 MM
CUT-OUT	: L 142 x W 37 MM
LUMENS	: 900Lm
POWERED BY	: OSRAM



PRR LUMI 1B

WATTS	: 20W ●
MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L 280 x W 45 x H 42 MM
CUT-OUT	: L 275 x W 37 MM
LUMENS	: 1800Lm
POWERED BY	: OSRAM



PRR LUMI 2B

WATTS	: 9W ●
MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 85 x 35 MM
CUT-OUT	: Ø 75 MM
LUMENS	: 900Lm
POWERED BY	: OSRAM



PRR LUMI 3B

WATTS	: 2 X 7 W ●
MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 38°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L 112 x W 112 x H 88 MM
CUT-OUT	: L 100 x W 100 MM
LUMENS	: 1150Lm
POWERED BY	: OSRAM



PRR RIGA 1B

WATTS	: 4 X 7 W ●
MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 38°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L 194 x W 112 x H 88 MM
CUT-OUT	: L 180 x W 100 MM
LUMENS	: 2300Lm
POWERED BY	: OSRAM



PRR RIGA 2B

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 3 X 2W
MATERIAL	: SAND WHITE + BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L 81 x W 31 x H 50 MM
CUT-OUT	: L 75 x W 25 MM
LUMENS	: 660Lm
POWERED BY	: BRIDGELUX



PRR LINEA-DOT 1A

WATTS	: 5 X 2W
MATERIAL	: SAND WHITE + BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L 121 x W 31 x H 50 MM
CUT-OUT	: L 115 x W 25 MM
LUMENS	: 1100Lm
POWERED BY	: BRIDGELUX



PRR LINEA-DOT 2A

WATTS	: 9 X 2W
MATERIAL	: SAND WHITE + BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L 76 x W 76 x H 50 MM
CUT-OUT	: L 70 x W 70 MM
LUMENS	: 1980Lm
POWERED BY	: BRIDGELUX



PRR LINEA-DOT 3A

WATTS	: 1 X 5W
MATERIAL	: SAND WHITE + BLACK & ALUMINIUM
BEAM ANGLE	: 35°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L 56 x W 56 x H 45 MM
CUT-OUT	: L 50 x W 50 MM
LUMENS	: 550Lm
POWERED BY	: BRIDGELUX



PRR LINEA-SPOT 1A

WATTS	: 2 X 5 W
MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 35°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L 99 x W 45 x H 56 MM
CUT-OUT	: L 90 x W 50 MM
LUMENS	: 1100Lm
POWERED BY	: BRIDGELUX



PRR LINEA-SPOT 2A

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 3 X 5 W
MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 35°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L 142 x W 56 x H 45 MM
CUT-OUT	: L 135 x W 50 MM
LUMENS	: 1650Lm
POWERED BY	: BRIDGELUX



PRR LINEA-SPOT 3A

WATTS	:	12W	  	
FINISH	:	SAND WHITE + SAND WHITE		
BEAM ANGLE	:	36°		
CCT(K)	:	3000K, 4000K		
CRI	:	≥ 90		
DIMENSION	:	Ø 85 x 88 MM		
CUT-OUT	:	Ø 75 MM		
LUMENS	:	1200Lm		
POWERED BY	:	CREE		
USP	:	FRONT OPENABLE		



PRR DINO 1A

WATTS	:	12W			
FINISH	:	SAND BLACK + SAND BLACK			
BEAM ANGLE	:	36°			
CCT(K)	:	3000K, 4000K			
CRI	:	≥ 90			
DIMENSION	:	Ø 85 x 88 MM			
CUT-OUT	:	Ø 75 MM			
LUMENS	:	1200Lm			
POWERED BY	:	CREE			
USP	:	FRONT OPENABLE			



PRR DINO 1B

WATTS	:	12W	  	
FINISH	:	SAND WHITE + NICKEL BLACK		
BEAM ANGLE	:	36°		
CCT(K)	:	3000K, 4000K		
CRI	:	≥ 90		
DIMENSION	:	Ø 85 x 88 MM		
CUT-OUT	:	Ø 75 MM		
LUMENS	:	1200Lm		
POWERED BY	:	CREE		
USP	:	FRONT OPENABLE		



PRR DINO 1C

WATTS	:	12W	  	
FINISH	:	SAND WHITE + SAND WHITE		
BEAM ANGLE	:	36°		
CCT(K)	:	3000K, 4000K		
CRI	:	≥ 90		
DIMENSION	:	Ø 85 x 88 MM		
CUT-OUT	:	Ø 75 MM		
LUMENS	:	1200Lm		
POWERED BY	:	CREE		
USP	:	FRONT OPENABLE		



PRR ENZO 1A

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 12W ● ● ●	
FINISH	: SAND BLACK + SAND BLACK	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 85 x 88 MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 1200Lm	
POWERED BY	: CREE	
USP	: FRONT OPENABLE	
WATTS	: 12W ● ● ●	
FINISH	: SAND WHITE + SAND WHITE	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 85 x 88 MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 1200Lm	
POWERED BY	: CREE	
USP	: FRONT OPENABLE	
WATTS	: 12W ● ● ●	
FINISH	: SAND BLACK + SAND BLACK	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 85 x 88 MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 1200Lm	
POWERED BY	: CREE	
USP	: FRONT OPENABLE	
WATTS	: 12W ● ● ●	
FINISH	: SAND WHITE + SAND WHITE	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 85 x 88 MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 1200Lm	
POWERED BY	: CREE	
USP	: FRONT OPENABLE	
WATTS	: 12W ● ● ●	
FINISH	: SAND BLACK + SAND BLACK	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 85 x 88 MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 1200Lm	
POWERED BY	: CREE	
USP	: FRONT OPENABLE	

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 8W ● ● ●	 PRR OPTICAL 1
FINISH	: WHITE	
MATERIAL	: ALUMINIUM	
BEAM ANGLE	: 15° OR 38° OR 60°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: Ø 62 x H 85 MM	
CUT-OUT	: Ø 55 MM	
LUMENS	: 840Lm	
DRIVER	: FULHAM OR EQUIVALENT	
POWER BY	: CREE	
USP	: FRONT OPENABLE	
WATTS	: 12W ● ● ●	 PRR OPTICAL 2
FINISH	: WHITE	
MATERIAL	: ALUMINIUM	
BEAM ANGLE	: 15° OR 38° OR 60°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: Ø 84 x H 100 MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 1440Lm	
DRIVER	: FULHAM OR EQUIVALENT	
POWER BY	: CREE	
USP	: FRONT OPENABLE	
WATTS	: 20W ● ● ●	 PRR OPTICAL 3
FINISH	: WHITE	
MATERIAL	: ALUMINIUM	
BEAM ANGLE	: 15° OR 38° OR 60°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: Ø 110 x H 128 MM	
CUT-OUT	: Ø 95 MM	
LUMENS	: 2400Lm	
DRIVER	: FULHAM OR EQUIVALENT	
POWER BY	: CREE	
USP	: FRONT OPENABLE	
WATTS	: 8W ● ● ●	 PRR LUXUS 1A
FINISH & MATERIAL	: WHITE & ALUMINIUM	
REFLECTOR	: BLACK	
BEAM ANGLE	: 15° OR 38° OR 60°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: Ø 62 x H 86 MM	
CUT-OUT	: Ø 55 MM	
LUMENS	: 840Lm	
DRIVER	: FULHAM OR EQUIVALENT	
POWER BY	: CREE	
USP	: FRONT OPENABLE	
WATTS	: 8W ● ● ●	 PRR LUXUS 1B
FINISH & MATERIAL	: BLACK & ALUMINIUM	
REFLECTOR	: BLACK	
BEAM ANGLE	: 15° OR 38° OR 60°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: Ø 62 x H 86 MM	
CUT-OUT	: Ø 55 MM	
LUMENS	: 840Lm	
DRIVER	: FULHAM OR EQUIVALENT	
POWER BY	: CREE	
USP	: FRONT OPENABLE	

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 12W ● ● ●	
FINISH & MATERIAL	: WHITE & ALUMINIUM	
REFLECTOR	: BLACK	
BEAM ANGLE	: 15° OR 38° OR 60°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: Ø 84 x H 104 MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 1440Lm	
DRIVER	: FULHAM OR EQUIVALENT	
POWER BY	: CREE	
USP	: FRONT OPENABLE	
DRIVER(ON/OFF)	: FULHAM OR EQUIVALENT	
WATTS	: 20W ● ● ●	
FINISH & MATERIAL	: BLACK & ALUMINIUM	
REFLECTOR	: BLACK	
BEAM ANGLE	: 15° OR 38° OR 60°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: Ø 110 x H 127 MM	
CUT-OUT	: Ø 95 MM	
LUMENS	: 2400Lm	
DRIVER	: FULHAM OR EQUIVALENT	
POWER BY	: CREE	
USP	: FRONT OPENABLE	
DRIVER(ON/OFF)	: FULHAM OR EQUIVALENT	
WATTS	: 20W	
FINISH & MATERIAL	: BLACK & ALUMINIUM	
REFLECTOR	: BLACK	
BEAM ANGLE	: 15° OR 38° OR 60°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: Ø 110 x H 127 MM	
CUT-OUT	: Ø 95 MM	
LUMENS	: 2400Lm	
DRIVER	: FULHAM OR EQUIVALENT	
POWER BY	: CREE	
USP	: FRONT OPENABLE	
DRIVER(ON/OFF)	: FULHAM OR EQUIVALENT	
WATTS	: 20W	
FINISH & MATERIAL	: BLACK & ALUMINIUM	
REFLECTOR	: BLACK	
BEAM ANGLE	: 15° OR 38° OR 60°	
CCT(K)	: 3000K, 4000K, 5000K	
CRI	: ≥ 90	
DIMENSION	: Ø 110 x H 127 MM	
CUT-OUT	: Ø 95 MM	
LUMENS	: 2400Lm	
DRIVER	: FULHAM OR EQUIVALENT	
POWER BY	: CREE	
USP	: FRONT OPENABLE	
DRIVER(ON/OFF)	: FULHAM OR EQUIVALENT	

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 12W	● ● ●
IP RATING	: IP44	
MATERIAL	: SAND WHITE + ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 82 x H 62 MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 960Lm	
POWERED BY	: CREE	



PRR MOIST 1A

WATTS	: 12W	● ● ●
IP RATING	: IP44	
MATERIAL	: SAND BLACK + ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 90	
DIMENSION	: Ø 82 x H 62 MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 960Lm	
POWERED BY	: CREE	



PRR MOIST 1B

WATTS	: 8W	● ● ●
IP RATING	: IP44	
MATERIAL	: ALUMINIUM	
FINISH	: SAND WHITE & BLACK INNER	
CRI	: 90	
BEAM ANGLE	: 15° / 36° / 55°	
LUMEN	: 960Lm	
CCT	: 3000K, 4000K	
DIMENSION	: Ø 74 X H 99 MM	
POWERED BY	: CREE	



PRR NARIO 1A

WATTS	: 15W	● ● ●
IP RATING	: IP44	
MATERIAL	: ALUMINIUM	
FINISH	: SAND WHITE & BLACK INNER	
CRI	: 90	
BEAM ANGLE	: 15° / 36° / 55°	
LUMEN	: 1800Lm	
CCT	: 3000K, 4000K	
DIMENSION	: Ø 94 X H 115 MM	
POWERED BY	: CREE	



PRR NARIO 2A

WATTS	: 8W	● ● ●
IP RATING	: IP44	
MATERIAL	: ALUMINIUM	
FINISH	: SAND BLACK & BLACK INNER	
CRI	: 90	
BEAM ANGLE	: 15° / 36° / 55°	
LUMEN	: 960Lm	
CCT	: 3000K, 4000K	
DIMENSION	: Ø 74 X H 99 MM	
POWERED BY	: CREE	



PRR NARIO 1B

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 15W	● ● ●
IP RATING	: IP44	
MATERIAL	: ALUMINIUM	
FINISH	: SAND BLACK & BLACK INNER	
CRI	: 90	
BEAM ANGLE	: 15° / 36° / 55°	
LUMEN	: 1800Lm	
CCT	: 3000K, 4000K	
DIMENSION	: Ø 94 X H 115 MM	
POWERED BY	: CREE	



PRR NARIO 2B

WATTS	: 8W	● ● ●
IP RATING	: IP44	
MATERIAL	: ALUMINIUM	
FINISH	: BRASS & BLACK INNER	
CRI	: 90	
BEAM ANGLE	: 15° / 36° / 55°	
LUMEN	: 960Lm	
CCT	: 3000K, 4000K	
DIMENSION	: Ø 74 X H 99 MM	
POWERED BY	: CREE	



PRR NARIO 1C

WATTS	: 15W	● ● ●
IP RATING	: IP44	
MATERIAL	: ALUMINIUM	
FINISH	: BRASS & BLACK INNER	
CRI	: 90	
BEAM ANGLE	: 15° / 36° / 55°	
LUMEN	: 1800Lm	
CCT	: 3000K, 4000K	
DIMENSION	: Ø 94 X H 115 MM	
POWERED BY	: CREE	



PRR NARIO 2C

WATTS	: 3W (UP) + 7W (DOWN)	
MATERIAL	: ALUMINIUM	
FINISH	: SAND BLACK	
CRI	: 90	
BEAM ANGLE	: 24°	
LUMEN	: 630Lm	
CCT	: 3000K, 4000K	
DIMENSION	: Ø 113 X 90 MM	
POWERED BY	: EPISTAR	



PRR REGENT 1B

WATTS	: 3W (UP) + 15W (DOWN)	
MATERIAL	: ALUMINIUM	
FINISH	: SAND BLACK	
CRI	: 90	
BEAM ANGLE	: 24°	
LUMEN	: 1350Lm	
CCT	: 3000K, 4000K	
DIMENSION	: Ø 138 X 90 MM	
POWERED BY	: EPISTAR	



PRR REGENT 2B

PRODUCT DESCRIPTION**PRODUCT**

WATTS	: 6W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 24°
LUMEN	: 500Lm
CCT	: 3000K, 4000K
DIMENSION	: L 85 X W 35 X H 65 MM
POWERED BY	: OSRAM

**PRR MABEL 1B**

WATTS	: 10W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 24°
LUMEN	: 800Lm
CCT	: 3000K, 4000K
DIMENSION	: L 138 X W 35 X H 65 MM
POWERED BY	: OSRAM

**PRR MABEL 2B**

WATTS	: 4 X 1.5 W
MATERIAL	: ALUMINIUM
FINISH	: SAND WHITE & BLACK INNER
CRI	: 90
BEAM ANGLE	: 24°
LUMEN	: 660Lm
CCT	: 3000K, 4000K
DIMENSION	: 200 X 28 x H 50 MM
POWERED BY	: BRIDGELUX

**PRR LINEA-LINE 1A**

WATTS	: 8 X 1.5 W
MATERIAL	: ALUMINIUM
FINISH	: SAND WHITE & BLACK INNER
CRI	: 90
BEAM ANGLE	: 24°
LUMEN	: 1320Lm
CCT	: 3000K, 4000K
DIMENSION	: 400 X 28 x H 50 MM
POWERED BY	: BRIDGELUX

**PRR LINEA-LINE 2A**

WATTS	: 20W
MATERIAL	: ALUMINIUM
FINISH	: BLACK & BLACK INNER
CRI	: 90
BEAM ANGLE	: 36°
LUMEN	: 1800Lm
CCT	: 3000K, 4000K
DIMENSION	: 340 X 113 x H 26 MM
POWERED BY	: CREE

**PRR JACK 1B**

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 7W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 32°
LUMEN	: 630Lm
CCT	: 3000K, 4000K
DIMENSION	: Ø 35 X (140x1) X H 395 MM
POWERED BY	: CREE



PRR UNICO 1B

WATTS	: 2 X 7 W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 32°
LUMEN	: 1260Lm
CCT	: 3000K, 4000K
DIMENSION	: Ø 35 X (140x2) X H 430 MM
POWERED BY	: CREE



PRR UNICO 2B

WATTS	: 7W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 36°
LUMEN	: 630Lm
CCT	: 3000K, 4000K
DIMENSION	: Ø 64 X H 196 MM
POWERED BY	: CREE



PRR FALL 1B

WATTS	: 7W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 36°
LUMEN	: 630Lm
CCT	: 3000K, 4000K
DIMENSION	: Ø 64 X H 326 MM
POWERED BY	: CREE





PRR FALL 2B

WATTS	: 10W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 20° X 35° (Adjustable)
LUMEN	: 900Lm
CCT	: 3000K
DIMENSION	: Ø 45 X H 160 MM
POWERED BY	: CREE



PRR LENS

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 12W	 PRR IDO 1A
MATERIAL	: ALUMINIUM DIE-CAST	
FINISH	: WHITE	
CRI	: RA>90	
BEAM ANGLE	: 36°	
LUMEN	: 1656Lm	
DIMMING	: 350mA TRIAC DIMMING	
CCT	: 3000K, 4000K	
DIMENSION	: 102 X H 84 MM	
ADJUST. ANGLE	: LAMP HEAD 0 ~ 45° / 350°	
POWERED BY	: BRIDGELUX	
WATTS	: 12W	 PRR IDO 1B
MATERIAL	: ALUMINIUM DIE-CAST	
FINISH	: BLACK	
CRI	: RA>90	
BEAM ANGLE	: 36°	
LUMEN	: 1656Lm	
DIMMING	: 350mA TRIAC DIMMING	
CCT	: 3000K, 4000K	
DIMENSION	: 102 X H 84 MM	
ADJUST. ANGLE	: LAMP HEAD 0 ~ 45° / 350°	
POWERED BY	: BRIDGELUX	
WATTS	: 5W (ASYMETRIC ANGLE)	 PRR PRACO 1A
MATERIAL	: ALUMINIUM	
FINISH	: SAND WHITE + BLACK	
CRI	: 90	
BEAM ANGLE	: 65° + 26° ∠ 18°	
LUMEN	: 310Lm	
CCT	: 3000K, 4000K	
DIMENSION	: Ø 56 X 56 X 70 MM	
POWERED BY	: BRIDGELUX	
WATTS	: 5W (ASYMETRIC ANGLE)	 PRR PRACO 1B
MATERIAL	: ALUMINIUM	
FINISH	: SAND BLACK + BLACK	
CRI	: 90	
BEAM ANGLE	: 65° + 26° ∠ 18°	
LUMEN	: 310Lm	
CCT	: 3000K, 4000K	
DIMENSION	: Ø 56 X 56 X 70 MM	
POWERED BY	: BRIDGELUX	
WATTS	: 2 X 5W (ASYMETRIC ANGLE)	 PRR PRACO 2A
MATERIAL	: ALUMINIUM	
FINISH	: SAND WHITE + BLACK	
CRI	: 90	
BEAM ANGLE	: 65° + 26° ∠ 18°	
LUMEN	: 690Lm	
CCT	: 3000K, 4000K	
DIMENSION	: Ø 99 X 56 X 70 MM	
POWERED BY	: BRIDGELUX	

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 2 X 5W (ASYMETRIC ANGLE)	
MATERIAL	: ALUMINIUM	
FINISH	: SAND BLACK + BLACK	
CRI	: 90	
BEAM ANGLE	: 65° + 26° ∠ 18°	
LUMEN	: 690Lm	PRR PRACO 2B
CCT	: 3000K, 4000K	
DIMENSION	: Ø 99 X 56 X 70 MM	
POWERED BY	: BRIDGELUX	
WATTS	: 20W	
MATERIAL	: ALUMINIUM + PC	
FINISH	: SAND BLACK	PRR STELLA 1B
CRI	: 90	
BEAM ANGLE	: 110°	
LUMEN	: 4200Lm	
CCT	: 3000K, 4000K	
DIMENSION	: Ø 400 X 85 MM	
DIMMING	: TRIAC DIMMABLE	PRR LORENZO 1B
POWERED BY	: EVERLITE	
WATTS	: 60W	
MATERIAL	: ALUMINIUM + PC	
FINISH	: SAND BLACK + GOLD	
CRI	: 90	
BEAM ANGLE	: 110°	PRR LORENZO 2B
LUMEN	: 7200Lm	
CCT	: 3000K, 4000K	
DIMENSION	: Ø 600 X 85 MM	
DIMMING	: TRIAC DIMMABLE	
POWERED BY	: EVERLITE	
POWER	: 33W SMD & 7W SPOT	
MATERIAL	: ALUMINIUM & ACRYLIC	
FINISH	: BLACK + BLACK SPOT	
CRI	: RA>90	
BEAM ANGLE (SPOT)	: 36°	
LUMEN	: 3200Lm	PRR AURA
CCT	: SMD 4000K & SPOT 3000K	
DIMENSION	: 400 X 70 MM	
POWERED BY	: CITIZEN	

Fundamental of Lighting - Part 2

Light Distribution Beam Angle and Optics

Beam Angle

The beam angle defines the spread of light emitted from a fixture. Narrow angles ($<25^\circ$): Result in a focused beam, suitable for spotlighting specific objects or creating dramatic accent lighting. Wide angles ($>60^\circ$) : Provide a broad light distribution, ideal for general illumination or floodlighting large areas, ensuring uniform coverage.

Optics

Optics are internal components (like reflectors and lenses) used to control the direction, shape, and spread of light. Their purpose is to enhance beam control, improve lighting efficiency, and reduce glare, ensuring optimal performance and visual comfort.

Precision in Lighting The Role of Lenses

A lens is a transparent optical element, usually made of glass or plastic, designed to shape or diffuse light. Lenses are critical in modern lighting fixtures for various applications:

- ✓ **Focusing Light** : Concentrates light into a narrow, intense beam, ideal for spotlights or accent lighting.
- ✓ **Spreading Light** : Diffuses light to create a broader, more uniform distribution, suitable for general illumination or floodlights.
- ✓ **Softening Light** : Reduces harshness and glare, creating a more comfortable and aesthetically pleasing light output.

PRIME INDOOR SERIES



Available in : • CCT T & D • DT6 • DT8

PRODUCT DESCRIPTION

PRODUCT

WATT	: 12W	● ● ●
FINISH & MATERIAL	: WHITE/BLACK + ALUMINIUM	
CCT(K)	: 3000K , 4000K , 5000K, 6000K	
CRI	: ≥80	
BEAM ANGLE	: 110°	
DIMENSION	: 119 X H 53 MM	
CUT-OUT	: Ø 110 MM	
LUMEN	: 1080Lm	
DRIVER	: PRISHA OR EQUIVALENT	
DRIVER XP	: BAG & EQUIVALENT	
POWERED BY	: BRIDGELUX	



PRO VEGA 1A / 1B
PRO VEGA XP 1A / 1B

WATT	: 18W	● ● ●
FINISH & MATERIAL	: WHITE/BLACK + ALUMINIUM	
CCT(K)	: 3000K , 4000K , 5000K, 6000K	
CRI	: ≥80	
BEAM ANGLE	: 110°	
DIMENSION	: 154 X H 53 MM	
CUT-OUT	: Ø 146 MM	
LUMEN	: 1620Lm	
DRIVER	: PRISHA OR EQUIVALENT	
DRIVER XP	: BAG & EQUIVALENT	
POWERED BY	: BRIDGELUX	



PRO VEGA 2A / 2B
PRO VEGA XP 2A / 2B

WATT	: 10W	
MATERIAL	: ALUMINIUM	
FINISH	: WHITE / BLACK	
CCT(K)	: 3000K , 4000K , 5000K, 6000K	
CRI	: >80	
BEAM ANGLE	: 110°	
DIAMENTION	: 90 MM × H 58MM	
CUT-OUT	: 86 MM	
LUMEN	: 1000Lm	
DRIVER	: PRISHA ISOLATED OR EQUIVALENT	
POWERED BY	: BRIDGELUX	



PRE NEO 1A / 1B

WATT	: 16W	
MATERIAL	: ALUMINIUM	
FINISH	: WHITE / BLACK	
CCT(K)	: 3000K , 4000K , 5000K, 6000K	
CRI	: >80	
BEAM ANGLE	: 110°	
DIAMENTION	: 100 MM × H 58MM	
CUT-OUT	: 95 MM	
LUMEN	: 1600Lm	
DRIVER	: PRISHA ISOLATED OR EQUIVALENT	
POWERED BY	: BRIDGELUX	



PRE NEO 2A / 2B

WATTS	: 7W	
FINISH & MATERIAL	: SAND WHITE & ALUMINIUM	
BEAM ANGLE	: 120°	
CCT(K)	: 3000K, 4000K, 6000K	
DIMENSION	: 90 X H 30 MM	
CUT-OUT	: 75 MM	
POWERED BY	: BRIDGELUX	



SNIP GRACE 1A (ROUND)

PRODUCT DESCRIPTION**PRODUCT**

WATTS	: 16W
FINISH & MATERIAL	: SAND WHITE & ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K, 6000K
DIMENSION	: 120 X H 30 MM
CUT-OUT	: 105 MM
POWERED BY	: BRIDGELUX

**SNIP GRACE 2A (ROUND)**

WATTS	: 24W
FINISH & MATERIAL	: SAND WHITE & ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K, 6000K
DIMENSION	: 170 X H 30 MM
CUT-OUT	: 155 MM
POWERED BY	: BRIDGELUX

**SNIP GRACE 3A (ROUND)**

WATTS	: 7W
FINISH & MATERIAL	: SAND WHITE & ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K, 6000K
DIMENSION	: 90 X 90 X H 30 MM
CUT-OUT	: 75 X 75 MM
POWERED BY	: BRIDGELUX

**SNIP GRACE 1B (SQUARE)**

WATTS	: 16W
FINISH & MATERIAL	: SAND WHITE & ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K, 6000K
DIMENSION	: 120 X 120 X H 30 MM
CUT-OUT	: 105 X 105 MM
POWERED BY	: BRIDGELUX

**SNIP GRACE 2B (SQUARE)**

WATTS	: 24W
FINISH & MATERIAL	: SAND WHITE & ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K, 6000K
DIMENSION	: 170 X 170 X H 30 MM
CUT-OUT	: 155 X 155 MM
POWERED BY	: BRIDGELUX

**SNIP GRACE 3B (SQUARE)**

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 8W
MATERIAL	: ALUMINIUM
FINISH	: SAND WHITE/BLACK
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 100 x H 50 MM
LUMENS	: 720Lm
POWERED BY	: BRIDGELUX



PRE TUBO 1A / 1B

WATTS	: 15W
MATERIAL	: ALUMINIUM
FINISH	: SAND WHITE/BLACK
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 125 x H 50 MM
LUMENS	: 1350Lm
POWERED BY	: BRIDGELUX



PRE TUBO 2A / 2B

WATTS	: 18W
MATERIAL	: ALUMINIUM
FINISH & MATERIAL	: MATT WHITE / BLACK
DIFFUSER	: PREMIUM HIGH TRANSMISSION PC
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 590 X 50 X H 70 MM
DRIVER	: PRISHA ISOLATED
POWERED BY	: BRIDGELUX



PRE LEAD 1A / 1B (SUSPENDED)

WATTS	: 18W
MATERIAL	: ALUMINIUM
FINISH	: WOODEN FINISH
DIFFUSER	: PREMIUM HIGH TRANSMISSION PC
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 590 X 50 X H 70 MM
DRIVER	: PRISHA ISOLATED
POWERED BY	: BRIDGELUX



PRE LEAD 1C (SUSPENDED)

WATTS	: 36W
MATERIAL	: ALUMINIUM
FINISH	: MATT WHITE / BLACK
DIFFUSER	: PREMIUM HIGH TRANSMISSION PC
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 1180 X 50 X H 70 MM
DRIVER	: PRISHA ISOLATED
POWERED BY	: BRIDGELUX



PRE LEAD 2A / 2B (SUSPENDED)

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 36W
MATERIAL	: ALUMINIUM
FINISH	: WOODEN FINISH
DIFFUSER	: PREMIUM HIGH TRANSMISSION PC
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 1180 X 50 X H 70 MM
DRIVER	: PRISHA ISOLATED
POWERED BY	: BRIDGELUX



PRE LEAD 2C (SUSPENDED)

WATTS	: 3W
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 85
DIMENSION	: 37 X H 26 MM
CUT-OUT	: Ø 32 MM
LUMENS	: 270Lm
POWERED BY	: BRIDGELUX



PRE COM 1A

WATTS	: 3W
FINISH & MATERIAL	: MATT BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 85
DIMENSION	: 37 X H 26 MM
CUT-OUT	: Ø 32 MM
LUMENS	: 270Lm
POWERED BY	: BRIDGELUX



PRE COM 1B

WATTS	: 7W
FINISH & MATERIAL	: MATT BLACK & ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 60 X H 52MM
CUT-OUT	: 50MM
LUMENS	: 630Lm
POWERED BY	: BRIDGELUX



PRE PURE

WATTS	: 3W
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 85
DIMENSION	: 65 X H 40 MM
CUT-OUT	: Ø 55 MM
LUMENS	: 270Lm
POWERED BY	: BRIDGELUX



PRE COSTA 1

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 7W	● ● ●
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 85 X H 60 MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 630Lm	
POWERED BY	: BRIDGELUX	



PRE COSTA 2

WATTS	: 12W	● ● ●
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 108 X H 68 MM	
CUT-OUT	: Ø 95 MM	
LUMENS	: 1080Lm	
POWERED BY	: BRIDGELUX	



PRE COSTA 3

WATTS	: 18W	● ● ●
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 128 X H 80 MM	
CUT-OUT	: Ø 116 MM	
LUMENS	: 1620Lm	
POWERED BY	: BRIDGELUX	



PRE COSTA 4

WATTS	: 24W	
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 136 X H 80 MM	
CUT-OUT	: Ø 120 MM	
LUMENS	: 2160Lm	
POWERED BY	: BRIDGELUX	



PRE COSTA 5

WATTS	: 7W	● ● ●
FINISH & MATERIAL	: MATT WHITE WITH GREY & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
DIMENSION	: 60 X H 70 MM	
CUT-OUT	: Ø 50 MM	
CRI	: ≥ 85	
LUMENS	: 630Lm	
POWER FACTOR	: ≥ 0.95	
POWERED BY	: BRIDGELUX	



PRE DIVINE 1

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 12W ● ● ●	 PRE DIVINE 2
FINISH & MATERIAL	: MATT WHITE WITH GREY & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K , 6000K	
DIMENSION	: 80 X H 80 MM	
CUT-OUT	: Ø 72 MM	
CRI	: ≥ 85	
LUMENS	: 1080Lm	
POWER FACTOR	: ≥ 0.95	
POWERED BY	: BRIDGELUX	
WATTS	: 18W ● ● ●	 PRE DIVINE 3
FINISH & MATERIAL	: MATT WHITE WITH GREY & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K , 6000K	
DIMENSION	: 92 X H 100 MM	
CUT-OUT	: Ø 80 MM	
CRI	: ≥ 85	
LUMENS	: 1620Lm	
POWER FACTOR	: ≥ 0.95	
POWERED BY	: BRIDGELUX	
WATTS	: 7W ● ● ●	 PRE DIVITE 1
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
DIMENSION	: 60 X H 70 MM	
CUT-OUT	: Ø 50 MM	
CRI	: ≥85	
LUMENS	: 630Lm	
POWERED BY	: BRIDGELUX	
WATTS	: 12W ● ● ●	 PRE DIVITE 2
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
DIMENSION	: 80 X H 80 MM	
CUT-OUT	: Ø 72 MM	
CRI	: ≥85	
LUMENS	: 1080Lm	
POWERED BY	: BRIDGELUX	
WATTS	: 18W ● ● ●	 PRE DIVITE 3
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
DIMENSION	: 92 X H 100 MM	
CUT-OUT	: Ø 80 MM	
CRI	: ≥85	
LUMENS	: 1620Lm	
POWERED BY	: BRIDGELUX	

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 30W
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 6000K
DIMENSION	: 108 X H 120 MM
CUT-OUT	: Ø 100 MM
CRI	: ≥85
LUMENS	: 3000Lm
POWERED BY	: BRIDGELUX



PRE DIVITE 4

WATTS	:	7W	  	
FINISH & MATERIAL	:	MATT BLACK & ALUMINIUM		
BEAM ANGLE	:	36°		
CCT(K)	:	3000K, 4000K, 5000K, 6000K		
DIMENSION	:	60 X H 70 MM		
CUT-OUT	:	Ø 50 MM		
CRI	:	≥85		
LUMENS	:	630Lm		
POWERED BY	:	BRIDGELUX		



PRE DIVITE 1B

WATTS	:	12W	  	
FINISH & MATERIAL	:	MATT BLACK & ALUMINIUM		
BEAM ANGLE	:	36°		
CCT(K)	:	3000K, 4000K, 5000K, 6000K		
DIMENSION	:	80 X H 80 MM		
CUT-OUT	:	Ø 72 MM		
CRI	:	≥85		
LUMENS	:	1080Lm		
POWERED BY	:	BRIDGELUX		



PRE DIVITE 2B

WATTS	:	18W	  
FINISH & MATERIAL	:	MATT BLACK & ALUMINIUM	
BEAM ANGLE	:	36°	
CCT(K)	:	3000K, 4000K, 5000K, 6000K	
DIMENSION	:	92 X H 100 MM	
CUT-OUT	:	Ø 80 MM	
CRI	:	≥85	
LUMENS	:	1620Lm	
POWERED BY	:	BRIDGELUX	



PRE DIVITE 3B

WATTS	:	7W	  	
FINISH & MATERIAL	:	MATT WHITE & ALUMINIUM		
BEAM ANGLE	:	36°		
CCT(K)	:	3000K, 4000K, 5000K, 6000K		
CRI	:	≥ 85		
DIMENSION	:	59 X H 60 MM		
CUT-OUT	:	Ø 52 MM		
LUMENS	:	630Lm		
POWERED BY	:	BRIDGELUX		



PRE COST 1

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 12W	● ● ●
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 82 X H 71 MM	
CUT-OUT	: Ø 72 MM	
LUMENS	: 1080Lm	
POWERED BY	: BRIDGELUX	



PRE COST 2

WATTS	: 18W	● ● ●
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 98 X H 86 MM	
CUT-OUT	: Ø 90 MM	
LUMENS	: 1620Lm	
POWERED BY	: BRIDGELUX	



PRE COST 3

WATTS	: 30W	
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 118 X H 125 MM	
CUT-OUT	: Ø 106 MM	
LUMENS	: 2700Lm	
POWERED BY	: BRIDGELUX	



PRE COST 4

WATTS	: 7W	● ● ●
FINISH & MATERIAL	: MATT BLACK & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 59 X H 60 MM	
CUT-OUT	: Ø 52 MM	
LUMENS	: 630Lm	
POWERED BY	: BRIDGELUX	



PRE COST 1B

WATTS	: 12W	● ● ●
FINISH & MATERIAL	: MATT BLACK & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 82 X H 71 MM	
CUT-OUT	: Ø 72 MM	
LUMENS	: 1080Lm	
POWERED BY	: BRIDGELUX	



PRE COST 2B

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 18W	● ● ●
FINISH & MATERIAL	: MATT BLACK & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 98 X H 86 MM	
CUT-OUT	: Ø 90 MM	
LUMENS	: 1620Lm	
POWERED BY	: BRIDGELUX	



PRE COST 3B

WATTS	: 7W	● ● ●
FINISH & MATERIAL	: ROSE GOLD & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 59 X H 60 MM	
CUT-OUT	: Ø 52 MM	
LUMENS	: 630Lm	
POWERED BY	: BRIDGELUX	



PRE GOLD 1

WATTS	: 12W	● ● ●
FINISH & MATERIAL	: ROSE GOLD & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 82 X H 71 MM	
CUT-OUT	: Ø 72 MM	
LUMENS	: 1080Lm	
POWERED BY	: BRIDGELUX	



PRE GOLD 2

WATTS	: 18W	● ● ●
FINISH & MATERIAL	: ROSE GOLD & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 98 X H 86 MM	
CUT-OUT	: Ø 90 MM	
LUMENS	: 1620Lm	
POWERED BY	: BRIDGELUX	



PRE GOLD 3

WATTS	: 12W	● ● ●
FINISH & MATERIAL	: SAND WHITE & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 60 X H 67 MM	
CUT-OUT	: Ø 52 MM	
LUMENS	: 1080Lm	
POWERED BY	: BRIDGELUX	



PRE CODE 1A

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 12W ● ● ●
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 67 MM
CUT-OUT	: Ø 52 MM
LUMENS	: 1080Lm
POWERED BY	: BRIDGELUX



PRE CODE 1B

WATTS	: 12W ● ● ●
FINISH & MATERIAL	: GUN BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 67 MM
CUT-OUT	: Ø 52 MM
LUMENS	: 1080Lm
POWERED BY	: BRIDGELUX



PRE CODE 1C

WATTS	: 12W ● ● ●
FINISH & MATERIAL	: ROSE GOLD & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 67 MM
CUT-OUT	: Ø 52 MM
LUMENS	: 1080Lm
POWERED BY	: BRIDGELUX



PRE CODE 1D

WATTS	: 18W ● ● ●
FINISH & MATERIAL	: SAND WHITE & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 72 X H 75 MM
CUT-OUT	: Ø 65 MM
LUMENS	: 1620Lm
POWERED BY	: BRIDGELUX



PRE CODE 2A

WATTS	: 18W ● ● ●
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 72 X H 75 MM
CUT-OUT	: Ø 65 MM
LUMENS	: 1620Lm
POWERED BY	: BRIDGELUX



PRE CODE 2B

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 18W	● ● ●
FINISH & MATERIAL	: GUN BLACK & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 72 X H 75 MM	
CUT-OUT	: Ø 65 MM	
LUMENS	: 1620Lm	
POWERED BY	: BRIDGELUX	



PRE CODE 2C

WATTS	: 18W	● ● ●
FINISH & MATERIAL	: ROSE GOLD & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 72 X H 75 MM	
CUT-OUT	: Ø 65 MM	
LUMENS	: 1620Lm	
POWERED BY	: BRIDGELUX	



PRE CODE 2D

WATTS	: 7W	● ● ●
FINISH & MATERIAL	: WHITE & WHITE + ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 62 X H 43 MM	
CUT-OUT	: Ø 54 MM	
LUMENS	: 700Lm	
POWERED BY	: BRIDGELUX	



PRE META 1A

WATTS	: 7W	● ● ●
FINISH & MATERIAL	: BLACK & BLACK + ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 62 X H 43 MM	
CUT-OUT	: Ø 54 MM	
LUMENS	: 700Lm	
POWERED BY	: BRIDGELUX	



PRE META 1B

WATTS	: 12W	● ● ●
FINISH & MATERIAL	: WHITE & WHITE + ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 82 X H 45 MM	
CUT-OUT	: Ø 74 MM	
LUMENS	: 1200Lm	
POWERED BY	: BRIDGELUX	



PRE META 2A

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 12W ● ● ●	 PRE META 2B
FINISH & MATERIAL	: BLACK & BLACK + ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 82 X H 45 MM	
CUT-OUT	: Ø 74 MM	
LUMENS	: 1200Lm	 PRE VIITOR 1A
POWERED BY	: BRIDGELUX	
WATTS	: 12W ● ● ●	
FINISH & MATERIAL	: MATT WHITE + ALUMINIUM	
REFLECTOR	: SHINE BLACK	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 72 X H 73 MM	 PRE VIITOR 1B
CUT-OUT	: Ø 64 MM	
LUMENS	: 1200Lm	
POWERED BY	: BRIDGELUX	
WATTS	: 12W ● ● ●	
FINISH & MATERIAL	: MATT BLACK + ALUMINIUM	
REFLECTOR	: SHINE BLACK	
BEAM ANGLE	: 36°	 PRE VIITOR 2A
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 83 X H 84 MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 1800Lm	
POWERED BY	: BRIDGELUX	
WATTS	: 18W ● ● ●	 PRE VIITOR 2B
FINISH & MATERIAL	: MATT BLACK + ALUMINIUM	
REFLECTOR	: SHINE BLACK	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 83 X H 84 MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 1800Lm	
POWERED BY	: BRIDGELUX	

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 7W	● ● ●
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 70 X H 53 MM	
CUT-OUT	: Ø 60 MM	
LUMENS	: 630Lm	
POWERED BY	: BRIDGELUX	



PRE COIN 1

WATTS	: 12W	● ● ●
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 92 X H 75 MM	
CUT-OUT	: Ø 75 MM	
LUMENS	: 1080Lm	
POWERED BY	: BRIDGELUX	



PRE COIN 2

WATTS	: 18W	● ● ●
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
CRI	: ≥ 85	
DIMENSION	: 110 X H 76 MM	
CUT-OUT	: Ø 80 MM	
LUMENS	: 1620Lm	
POWERED BY	: BRIDGELUX	



PRE COIN 3

WATTS	: 3W	
FINISH & MATERIAL	: MATT WHITE + BLACK & ALUMINIUM	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 85	
DIMENSION	: 67 x 32 x H 33 MM	
CUT-OUT	: Ø 62 x 25 MM	
LUMENS	: 300 Lm	
POWERED BY	: BRIDGELUX	



PRE FILA 1A

WATTS	: 3W	
FINISH & MATERIAL	: MATT BLACK + BLACK & ALUMINIUM	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥ 85	
DIMENSION	: 67 x 32 x H 33 MM	
CUT-OUT	: Ø 62 x 25 MM	
LUMENS	: 300 Lm	
POWERED BY	: BRIDGELUX	



PRE FILA 1B

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 6W
FINISH & MATERIAL	: MATT WHITE + BLACK & ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K,4000K
CRI	: ≥85
DIMENSION	: 121 x 32 x H 35 MM
CUT-OUT	: Ø 113 x 25 MM
LUMENS	: 600 Lm
POWERED BY	: BRUDGELUX



PRE FILA 2A

WATTS	: 6W
FINISH & MATERIAL	: MATT BLACK + BLACK & ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K,4000K
CRI	: ≥85
DIMENSION	: 121 x 32 x H 35 MM
CUT-OUT	: Ø 113 x 25 MM
LUMENS	: 600 Lm
POWERED BY	: BRUDGELUX



PRE FILA 2B

WATTS	: 5 X 2W	● ● ● ●
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
DIMENSION	: 146 X H 44 MM	
CUT-OUT	: 137 X 35 MM	
POWERED BY	: BRIDGELUX	
DRIVER	: BAG or EQUIVALENT	



SNIP TAGO 1A / 1B

WATTS	: 10 X 2W	● ● ● ●
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
DIMENSION	: 281 X H 44 MM	
CUT-OUT	: 271 X 35 MM	
POWERED BY	: BRIDGELUX	
DRIVER	: BAG or EQUIVALENT	



SNIP TAGO 2A / 2B

WATTS	: 1 X 4W
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
DIMENSION	: 51 X H 51 MM
CUT-OUT	: 41 X 41 MM
POWERED BY	: BRIDGELUX
DRIVER	: BAG or EQUIVALENT



SNIP RAGA 1A / 1B

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 3 X 4W	● ● ●
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
DIMENSION	: 128 X H 50 MM	
CUT-OUT	: 118 X 42 MM	
POWERED BY	: BRIDGELUX	
DRIVER	: BAG or EQUIVALENT	



SNIP RAGA 2A / 2B

WATTS	: 5 X 4W	● ● ●
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM	
BEAM ANGLE	: 36°	
CCT(K)	: 3000K, 4000K, 5000K, 6000K	
DIMENSION	: 205 x 50 x H 55 MM	
CUT-OUT	: 195 x 42 MM	
POWERED BY	: BRIDGELUX	
DRIVER	: BAG or EQUIVALENT	



SNIP RAGA 3A / 3B

WATTS	: 1 X 12W = 12W	
FINISH & MATERIAL	: ALUMINIUM + WHITE	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥90	
DIMENSION	: 90 x 100	
CUT-OUT	: Ø 75 MM	
LUMENS	: 1320 Lm	
POWERED BY	: BRIDGELUX	



PRE DOMO 1A

WATTS	: 1 X 12W = 12W	
FINISH & MATERIAL	: ALUMINIUM + BLACK	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥90	
DIMENSION	: 90 x 100	
CUT-OUT	: Ø 75 MM	
LUMENS	: 1320 Lm	
POWERED BY	: BRIDGELUX	



PRE DOMO 1B

WATTS	: 2 X 12W = 24W	
FINISH & MATERIAL	: ALUMINIUM + WHITE	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K, 4000K	
CRI	: ≥90	
DIMENSION	: 170 x 90 x 100	
CUT-OUT	: Ø 155 x 75	
LUMENS	: 2640Lm	
POWERED BY	: BRIDGELUX	



PRE DOMO 2A

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 2 X 12W = 24W	
FINISH & MATERIAL	: ALUMINIUM + BLACK	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K,4000K	
CRI	: ≥90	
DIMENSION	: 170 x 90 x 100	
CUT-OUT	: Ø 155 x 75	
LUMENS	: 2640Lm	
POWERED BY	: BRIDGELUX	PRE DOMO 2B
WATTS	: 12W ● ● ●	
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K,4000K,5000K,6000K	
CRI	: ≥80	
DIMENSION	: 90 X H 95 MM	
CUT-OUT	: 83 MM	
LUMENS	: 1080LM	
POWERED BY	: BRIDGELUX	PRE SPOUT 1A
WATTS	: 12W ● ● ●	
FINISH & MATERIAL	: MATT BLACK & ALUMINIUM	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K,4000K,5000K,6000K	
CRI	: ≥80	
DIMENSION	: 90 X H 95 MM	
CUT-OUT	: 83 MM	
LUMENS	: 1080LM	
POWERED BY	: BRIDGELUX	PRE SPOUT 1B
WATTS	: 2X 12W = 24W ● ● ●	
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K,4000K,5000K,6000K	
CRI	: ≥80	
DIMENSION	: 175 X 95 X H 95 MM	
CUT-OUT	: L167 X W 82 MM	
LUMENS	: 2160LM	
POWERED BY	: BRIDGELUX	PRE SPOUT 2A
WATTS	: 2X 12W = 24W ● ● ●	
FINISH & MATERIAL	: MATT BLACK & ALUMINIUM	
BEAM ANGLE	: 24°	
CCT(K)	: 3000K,4000K,5000K,6000K	
CRI	: ≥80	
DIMENSION	: 175 X 95 X H 95 MM	
CUT-OUT	: L167 X W 82 MM	
LUMENS	: 2160LM	
POWERED BY	: BRIDGELUX	PRE SPOUT 2B

PRODUCT DESCRIPTION**PRODUCT**

WATTS	: 12W
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM
BEAM ANGLE	: 40°
CCT(K)	: 3000K,4000K
CRI	: ≥85
DIMENSION	: 68 X H 140 MM
CUT-OUT	: 60 MM
LUMENS	: 1080LM
POWERED BY	: BRIDGELUX

**PRE AMBRE 1A**

WATTS	: 12W
FINISH & MATERIAL	: NICKEL BLACK & ALUMINIUM
BEAM ANGLE	: 40°
CCT(K)	: 3000K,4000K
CRI	: ≥85
DIMENSION	: 68 X H 140 MM
CUT-OUT	: 60 MM
LUMENS	: 1080LM
POWERED BY	: BRIDGELUX

**PRE AMBRE 1B**

WATTS	: 12W
FINISH & MATERIAL	: MATT WHITE & ALUMINIUM
BEAM ANGLE	: 40°
CCT(K)	: 3000K,4000K
CRI	: ≥85
DIMENSION	: 68 X H 140 MM
LUMENS	: 1080LM
POWERED BY	: BRIDGELUX

**PRE AMBRETO 1A**

WATTS	: 12W
FINISH & MATERIAL	: NICKEL BLACK & ALUMINIUM
BEAM ANGLE	: 40°
CCT(K)	: 3000K,4000K
CRI	: ≥85
DIMENSION	: 68 X H 140 MM
LUMENS	: 1080LM
POWERED BY	: BRIDGELUX

**PRE AMBRETO 1B**

WATTS	: 7W
FINISH & MATERIAL	: SAND WHITE
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K
CRI	: ≥85
DIMENSION	: Ø 70 x H 77 MM
CUT-OUT	: 58 MM
LUMENS	: 630Lm
POWERED BY	: BRIDGELUX

**PRE SWING 1A**

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 12W
FINISH & MATERIAL	: SAND WHITE
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥85
DIMENSION	: Ø 85 x H 85 MM
CUT-OUT	: 60 MM
LUMENS	: 1080Lm
POWERED BY	: BRIDGELUX



PRE SWING 2A

WATTS	: 7W
FINISH & MATERIAL	: SAND BLACK
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥85
DIMENSION	: Ø 70 x H 77 MM
CUT-OUT	: 58 MM
LUMENS	: 630Lm
POWERED BY	: BRIDGELUX



PRE SWING 1B

WATTS	: 12W
FINISH & MATERIAL	: SAND BLACK
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥85
DIMENSION	: Ø 85 x H 85 MM
CUT-OUT	: 60 MM
LUMENS	: 1080Lm
POWERED BY	: BRIDGELUX



PRE SWING 2B

WATTS	: 7W
FINISH & MATERIAL	: GOLD + BLACK
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥85
DIMENSION	: Ø 70 x H 77 MM
CUT-OUT	: 58 MM
LUMENS	: 630Lm
POWERED BY	: BRIDGELUX



PRE SWING 1C

WATTS	: 12W
FINISH & MATERIAL	: GOLD + BLACK
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥85
DIMENSION	: Ø 85 x H 85 MM
CUT-OUT	: 60 MM
LUMENS	: 1080Lm
POWERED BY	: BRIDGELUX



PRE SWING 2C

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 7W
FINISH & MATERIAL	: SAND WHITE
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥85
DIMENSION	: Ø 70 x H 87 MM
LUMENS	: 630Lm
POWERED BY	: BRIDGELUX



PRE SWINGER 1A

WATTS	: 12W
FINISH & MATERIAL	: SAND WHITE
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥85
DIMENSION	: Ø 85 x H 106 MM
LUMENS	: 1080Lm
POWERED BY	: BRIDGELUX



PRE SWINGER 2A

WATTS	: 7W
FINISH & MATERIAL	: SAND BLACK
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥85
DIMENSION	: Ø 70 x H 87 MM
LUMENS	: 630Lm
POWERED BY	: BRIDGELUX



PRE SWINGER 1B

WATTS	: 12W
FINISH & MATERIAL	: SAND BLACK
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥85
DIMENSION	: Ø 85 x H 106 MM
LUMENS	: 1080Lm
POWERED BY	: BRIDGELUX



PRE SWINGER 2B

WATTS	: 7W
FINISH & MATERIAL	: GOLD + BLACK
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥85
DIMENSION	: Ø 70 x H 87 MM
LUMENS	: 630Lm
POWERED BY	: BRIDGELUX



PRE SWINGER 1C

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 12W
FINISH & MATERIAL	: GOLD + BLACK
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥85
DIMENSION	: Ø 85 x H 106 MM
LUMENS	: 1080Lm
POWERED BY	: BRIDGELUX



PRE SWINGER 2C

WATT	: 12W
FINISH & MATERIAL	: WHITE & ALUMINIUM
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥80
BEAM ANGLE	: 24°
DIMENSION	: 85 X H 71 MM
CUT-OUT	: Ø 78 MM
LUMEN	: 1350Lm
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	: CREE



PRO SCREW RD NEW

WATT	: 12W
FINISH & MATERIAL	: WHITE & ALUMINIUM
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥80
BEAM ANGLE	: 24°
DIMENSION	: 74 X H 88 MM
LUMEN	: 1350Lm
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	: CREE



PRO SCREW DRIVER MINI

WATTS	: 7W
FINISH	: MATT WHITE + BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K
CRI	: ≥85
DIMENSION	: 55 X H 60 MM
LUMENS	: 700Lm
POWERED BY	: BRIDGELUX



PRE CADMO 1A

WATTS	: 12W
FINISH	: MATT WHITE + BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K
CRI	: ≥85
DIMENSION	: 68 X H 68 MM
LUMENS	: 1200Lm
POWERED BY	: BRIDGELUX



PRE CADMO 2A



PRODUCT DESCRIPTION

PRODUCT

WATTS	: 7W
FINISH	: MATT WHITE & MATT BLACK
MATERIAL	: ALUMINIUM
REFLECTOR	: CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥85
DIMENSION	: 54 X H 75 MM
LUMENS	: 630Lm
POWERED BY	: BRIDGELUX



PRE BASILIO 1A/1B

WATTS	: 12W
FINISH	: MATT WHITE & MATT BLACK
MATERIAL	: ALUMINIUM
REFLECTOR	: CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥85
DIMENSION	: 76 X H 100 MM
LUMENS	: 1080Lm
POWERED BY	: BRIDGELUX



PRE BASILIO 2A/2B

WATTS	: 18W
FINISH	: MATT WHITE & MATT BLACK
MATERIAL	: ALUMINIUM
REFLECTOR	: CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥85
DIMENSION	: 94 X H 120 MM
LUMENS	: 1620Lm
POWERED BY	: BRIDGELUX



PRE BASILIO 3A/3B

WATTS	: 7W
FINISH & MATERIAL	: ALUMINIUM + WHITE
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥90
DIMENSION	: 50 x H 70 MM
LUMENS	: 1320 Lm
POWERED BY	: CREE



PRE ALPINE 1A / 1B

WATTS	: 12W
FINISH & MATERIAL	: ALUMINIUM + WHITE
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥90
DIMENSION	: 70 x H 75 MM
LUMENS	: 1320 Lm
POWERED BY	: CREE



PRE ALPINE 2A / 2B

PRODUCT DESCRIPTION**PRODUCT**

WATTS	: 20W
FINISH & MATERIAL	: ALUMINIUM + WHITE
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥90
DIMENSION	: 76 x H 95 MM
LUMENS	: 1320 Lm
POWERED BY	: CREE

**PRE ALPINE 3A / 3B**

WATTS	: 12W
FINISH & MATERIAL	: SAND WHITE & ALUMINIUM
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 54.5 X 135 MM
LUMENS	: 1020Lm
POWERED BY	: BRIDGELUX

**PRE LOOP EX 1A**

WATTS	: 12W
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 54.5 X 135 MM
LUMENS	: 1020Lm
POWERED BY	: BRIDGELUX

**PRE LOOP EX 1B**

WATTS	: 18W
FINISH & MATERIAL	: SAND WHITE & ALUMINIUM
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 63.5 X 155 MM
LUMENS	: 1530Lm
POWERED BY	: BRIDGELUX

**PRE LOOP EX 2A**

WATTS	: 18W
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 63.5 X 155 MM
LUMENS	: 1530Lm
POWERED BY	: BRIDGELUX

**PRE LOOP EX 2B**

PRODUCT DESCRIPTION**PRODUCT**

WATTS	: 30W
FINISH & MATERIAL	: SAND WHITE & ALUMINIUM
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 85
DIMENSION	: 76.5 X 180 MM
LUMENS	: 2550Lm
POWERED BY	: BRIDGELUX

**PRE LOOP EX 3A**

WATTS	: 30W
FINISH & MATERIAL	: SAND BLACK & ALUMINIUM
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 85
DIMENSION	: 76.5 X 180 MM
LUMENS	: 2550Lm
POWERED BY	: BRIDGELUX

**PRE LOOP EX 3B**

WATTS	: 7W
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
DIMENSION	: 70 X H 65 MM
CUT-OUT	: 60 MM
POWERED BY	: BRIDGELUX
DRIVER	: BAG or EQUIVALENT

**SNIP ECOB 1A / 1B**

WATTS	: 12W
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
DIMENSION	: 85 X H 75 MM
CUT-OUT	: 76 MM
POWERED BY	: BRIDGELUX
DRIVER	: BAG or EQUIVALENT

**SNIP ECOB 2A / 2B**

WATTS	: 15W
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
DIMENSION	: 85 X H 75 MM
CUT-OUT	: 76 MM
POWERED BY	: BRIDGELUX
DRIVER	: BAG or EQUIVALENT

**SNIP ECOB 3A / 3B**

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 18W
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
DIMENSION	: 95 X H 100 MM
CUT-OUT	: 86 MM
POWERED BY	: BRIDGELUX
DRIVER	: BAG or EQUIVALENT



SNIP ECOB 4A / 4B

WATTS	: 7W
FINISH & MATERIAL	: SAND WHITE & ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K, 6000K
DIMENSION	: 83 X 83 X H 83 MM
CUT-OUT	: 77 X 77 MM
POWERED BY	: BRIDGELUX
DRIVER	: BAG or EQUIVALENT



SNIP EMONDO 1A / 1B

WATTS	: 12W
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
DIMENSION	: 83 X 83 X H 83 MM
CUT-OUT	: 77 X 77 MM
POWERED BY	: BRIDGELUX
DRIVER	: BAG or EQUIVALENT



SNIP EMONDO 2A / 2B

WATTS	: 15W
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
DIMENSION	: 83 X 83 X H 83 MM
CUT-OUT	: 77 X 77 MM
POWERED BY	: BRIDGELUX
DRIVER	: BAG or EQUIVALENT



SNIP EMONDO 3A / 3B

WATTS	: 2 X 7W
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
DIMENSION	: 162 X 83 X H 83 MM
CUT-OUT	: 155 X 77 MM
POWERED BY	: BRIDGELUX
DRIVER	: BAG or EQUIVALENT



SNIP EMONDO TWIN 1A / 1B

PRODUCT DESCRIPTION**PRODUCT**

WATTS	: 2 X 12W
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
DIMENSION	: 162 X 83 X H 83 MM
CUT-OUT	: 155 X 77 MM
POWERED BY	: BRIDGELUX
DRIVER	: BAG or EQUIVALENT

**SNIP EMONDO TWIN 2A / 2B**

WATTS	: 2 X 15W
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
DIMENSION	: 162 X 83 X H 83 MM
CUT-OUT	: 155 X 77 MM
POWERED BY	: BRIDGELUX
DRIVER	: BAG or EQUIVALENT

**SNIP EMONDO TWIN 3A / 3B**

WATTS	: 16W
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSIONS	: 120 X 40MM
LUMENS	: 1350Lm
POWERED BY	: BRIDGELUX

**WANO-G 1A / 1B**

WATTS	: 24W
FINISH & MATERIAL	: SAND WHITE/BLACK & ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSIONS	: 175 X 40MM
LUMENS	: 1980Lm
POWERED BY	: BRIDGELUX

**WANO-G 2A / 2B**



SNIP LED STRIPS

ITEM CODE	WATT / METER	CCT	VOLTAGE	PCB WIDTH	PCB
60 LED / METER					
SLS 001	5W	3K	12V	8MM	DOUBLE PCB PET
SLS 002	5W	4K	12V	8MM	DOUBLE PCB PET
120 LED / METER					
SLS 003	12W	3K	12V	8MM	DOUBLE PCB PET
SLS 004	12W	4K	12V	8MM	DOUBLE PCB PET
SLS 005	12W	6K	12V	8MM	DOUBLE PCB PET
SLS 006	14W	3K	24V	8MM	DOUBLE PCB H PI
SLS 007	14W	4K	24V	8MM	DOUBLE PCB H PI
SLS 008	14W	3K	12V	8MM	DOUBLE PCB H PI
SLS 009	14W	4K	12V	8MM	DOUBLE PCB H PI
SLS 019	12W	3K	12V	5MM	DOUBLE PCB H PI
SLS 020	12W	4K	12V	5MM	DOUBLE PCB H PI
168 LED / METER					
SLS 010	17W	3K	12V	10MM	3Z PCB
SLS 011	17W	4K	12V	10MM	3Z PCB
SLS 012	17W	6K	12V	10MM	3Z PCB
SLS 013	17W	3K	24V	10MM	3Z PCB
SLS 014	17W	4K	24V	10MM	3Z PCB
SLS 023	17W	3K	12V	5MM	DOUBLE PCB H PI
SLS 024	17W	4K	12V	5MM	DOUBLE PCB H PI
192 LED / METER					
SLS 015	18W	3K	24V	10MM	3Z PCB
SLS 016	18W	4K	24V	10MM	3Z PCB
240 LED / METER					
SLS 017	22W	3K	24V	10MM	3Z PCB
SLS 018	22W	4K	24V	10MM	3Z PCB
SLS 021	22W	3K	12V	10MM	3Z PCB
SLS 022	22W	4K	12V	10MM	3Z PCB

SNIP SMPS DRIVER RANGE

SR.	CODE	DESCRIPTION	OUTPUT WATTAGE	DIMENSION-L x W x H (mm)
1	SLD 12V 2A	12V / 2A	24W	75 x 35 x 26
2	SLD 12V 5A	12V / 5A	60W	146 x 35 x 26
3	SLD 12V 8A	12V / 8A	96W	155 x 38 x 33
4	SLD 12V 10A	12V / 10A	120W	192 x 38 x 33
5	SLD 12V 12A	12V / 12A	144W	175 x 48 x 32
6	SLD 12V 20A	12V / 20A	240W	227 x 48 x 32
7	SLD 24V 2.5A	24V / 2.5A	60W	122 x 35 x 26
8	SLD 24V 5A	24V / 5A	120W	192 x 38 x 33
9	SLD 24V 10A	24V / 10A	240W	227 x 48 x 32

Fundamental of Lighting - Part 3

Durability and Protection Understanding IP Ratings

The Ingress Protection (IP) Rating indicates a lighting fixture's protection against dust and water. It follows the format IPXY, where:

- ✓ **X (First Digit)** : Represents protection against solids (ranging from 0 to 6, with 6 being dust-tight).
- ✓ **Y (Second Digit)** : Represents protection against liquids (ranging from 0 to 8, with 8 being submersible under pressure).

Example : An IP65 rating means the fixture is completely dust-tight (6) and protected against water jets (5), making it suitable for outdoor use or areas exposed to moisture.

Colour Consistency MacAdam Steps for Uniformity


MacAdam Steps, or MacAdam Ellipses, quantify the perceptible colour difference between multiple LEDs. It ensures colour consistency across lighting installations.

- ✓ **Fewer steps (e.g., 1-3)**: Indicates minimal colour variation, resulting in a highly uniform light appearance. This is crucial for applications where colour consistency is paramount, such as high-end retail or art galleries.
- ✓ **Higher steps (e.g., 5-7)**: Denotes more noticeable colour differences, which might be acceptable in less critical applications but could lead to visual discrepancies in large installations.

PRIVE OUTDOOR SERIES



COBRA FLEX



CE RoHS IP66




WATTS : 11.25W
MATERIAL : PC + TPU + PMMA
CCT(K) : 3000K
OPTICS : 15° x 45°
INPUT : DC24V (Driver not Included)
LUMENS : 930Lm PER FEET
LENGTH : 310 MM

WATTS : 22.5W
MATERIAL : PC + TPU + PMMA
CCT(K) : 3000K
OPTICS : 15° x 45°
INPUT : DC24V (Driver not Included)
LUMENS : 930Lm PER FEET
LENGTH : 600 MM

MOUNTING ACCESSORIES

TREE MOUNTING

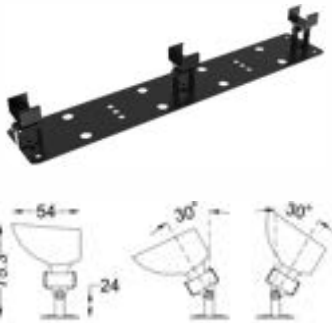

WALL MOUNTING



CONNECTING ACCESSORIES

POWER LEAD CABLE 300



M-12-2 PIN
L-300 MM

POWER LEAD CABLE 1800




M-12-2 PIN
L-1800 MM

JUNCTION CABLE



M-12-2 PIN
L-300 MM

TREEBO



WATTS	: 15W
BEAM ANGLE	: 10° 30° 60°
INPUT VOLTAGE	: AC220V
IMPACT PROTECTION	: IK08
INGRESS PROTECTION	: IP66
POWER FACTOR	: ≥0.95
LIFETIME	: >60000 HRS.
CCT(K)	: 3000K
CRI	: ≥90
DIMENSION	: Ø60 X 113 X 127 MM
LUMENS	: 1350LM
POWERED BY	: CREE
FINISH MATERIAL	: GRAPHITE GREY & CORROSION RESISTENT DIE-CAST ALUMINIUM HOUSING





PRR GLITZ 1A

WATTS	: 10W (ADJUSTABLE)
IP RATING	: IP65
MATERIAL	: SAND WHITE + NICKLE BLACK
BEAM ANGLE	: 38°
CCT(K)	: 3000K, 4000K
CRI	: ≥90
DIMENSION	: Ø62 X H 85 MM
CUT-OUT	: Ø55MM
LUMENS	: 1100Lm
POWERED BY	: OSRAM
DRIVER	: IP65



USP : FRONT OPENABLE

PRR GLITZ 2A

WATTS	: 18W (ADJUSTABLE)
IP RATING	: IP65
MATERIAL	: SAND WHITE + NICKLE BLACK
BEAM ANGLE	: 38°
CCT(K)	: 3000K, 4000K
CRI	: ≥90
DIMENSION	: Ø84 X H 110 MM
CUT-OUT	: Ø75MM
LUMENS	: 1980Lm
POWERED BY	: OSRAM
DRIVER	: IP65



USP : FRONT OPENABLE

PRR GLITZ 3A

WATTS	: 30W (ADJUSTABLE)
IP RATING	: IP65
MATERIAL	: SAND WHITE + NICKLE BLACK
BEAM ANGLE	: 38°
CCT(K)	: 3000K, 4000K
CRI	: ≥90
DIMENSION	: Ø110 X H 130 MM
CUT-OUT	: Ø95MM
LUMENS	: 3300Lm
POWERED BY	: OSRAM
DRIVER	: IP65



USP : FRONT OPENABLE

BRUN PLAFOND 1



WATTS	: 8W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 48°
LUMENS	: 700Lm
IP RATING	: IP54
UGR	: <16
DIMENSION	: Ø 110 X H 60MM
LAMP TYPE	: COB
POWERED BY	: CREE

BRUN SVELTO 1



WATTS	: 12W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 120°
LUMENS	: 1440Lm
IP RATING	: IP54
UGR	: <18
DIMENSION	: Ø 145 X 228 X H 406 MM
LAMP TYPE	: SMD
POWERED BY	: EDISON

BRUN SVELTO 2



WATTS	: 12W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 120°
LUMENS	: 1440Lm
IP RATING	: IP54
UGR	: <18
DIMENSION	: Ø 145 X 145 X H 360 MM
LAMP TYPE	: SMD
POWERED BY	: EDISON

BRUN SVELTO 3



WATTS	: 12W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 120°
LUMENS	: 1440Lm
IP RATING	: IP54
UGR	: <18
DIMENSION	: Ø 145 x 145 X H 1200 MM
LAMP TYPE	: SMD
POWERED BY	: EDISON

BRUN SVELTO 4



WATTS	: 12W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 1200
LUMENS	: 1440Lm
IP RATING	: IP54
UGR	: <18
DIMENSION	: Ø 145 X 145 X H 400 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION

BRUN SVELTO 5



WATTS	: 12W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 1200
LUMENS	: 1440Lm
IP RATING	: IP54
UGR	: <18
DIMENSION	: Ø 145 X 145 X H 600 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION

BRUN KINAKO 1



WATTS	: 6W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 1200
LUMENS	: 580Lm
IP RATING	: IP65
UGR	: <18
DIMENSION	: Ø 100 X 100 X H 108 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION

BRUN KINAKO 2



WATTS	: 6W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 1200
LUMENS	: 580Lm
IP RATING	: IP65
UGR	: <18
DIMENSION	: Ø 100 X 100 X H 350 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION



BRUN KINAKO 3



WATTS	: 6W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 1200
LUMENS	: 1440Lm
IP RATING	: IP54
UGR	: <18
DIMENSION	: Ø 100 X 100 X H 550 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION

BRUN LEGER 1



WATTS	: 12W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 1800
LUMENS	: 1200Lm
IP RATING	: IP65
UGR	: <22
DIMENSION	: Ø 180 X 80 X H 426 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION

BRUN LEGER 2



WATTS	: 16W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 1800
LUMENS	: 1550Lm
IP RATING	: IP65
UGR	: <22
DIMENSION	: Ø 180 X 80 X H 626 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION

BRUN BORNE 1



WATTS	: 8W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 1200
LUMENS	: 680Lm
IP RATING	: IP65
UGR	: 18
DIMENSION	: Ø 120 X 135 X H 230 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION

BRUN BORNE 2



WATTS	: 8W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 120O
LUMENS	: 860Lm
IP RATING	: IP65
UGR	: 18
DIMENSION	: Ø 125 X 158 X H 206 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION

BRUN BORNE 3



WATTS	: 8W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 120O
LUMENS	: 680Lm
IP RATING	: IP65
UGR	: 18
DIMENSION	: Ø 120 X 330 X H 800 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION

BRUN BORNE 4



WATTS	: 8W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 120O
LUMENS	: 680Lm
IP RATING	: IP65
UGR	: 18
DIMENSION	: Ø 120 X 330 X H 1500 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION

BRUN FIERO



WATTS	: 5W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 120O
LUMENS	: 580Lm
IP RATING	: IP65
UGR	: 18
DIMENSION	: Ø 105 X 240 X H 600 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION

BRUN CLAIR



WATTS	: 8.5W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 1800
LUMENS	: 800Lm
IP RATING	: IP65
UGR	: <22
DIMENSION	: Ø 400 X H 435 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION

BRUN LUMINA 1



WATTS	: 8W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 1200
LUMENS	: 720Lm
IP RATING	: IP65
UGR	: 18
DIMENSION	: Ø 60 X 60 X H 300 MM
LAMP TYPE	: COB
POWERED BY	: CREE

BRUN LUMINA 2



WATTS	: 8W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 1200
LUMENS	: 720Lm
IP RATING	: IP65
UGR	: 18
DIMENSION	: Ø 60 X 60 X H 600 MM
LAMP TYPE	: COB
POWERED BY	: CREE

BRUN LUMINA 3



WATTS	: 8W
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 1200
LUMENS	: 720Lm
IP RATING	: IP65
UGR	: 18
DIMENSION	: Ø 60 X 80 X H 250 MM
LAMP TYPE	: COB
POWERED BY	: CREE



BRUN

BRUN LUMIERE 1



WATTS	: 6W
ADJUSTABILITY	: 2500
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 350
LUMENS	: 550Lm
IP RATING	: IP65
UGR	: <16
DIMENSION	: Ø 95 X 140 X 180 MM
LAMP TYPE	: COB
POWERED BY	: CREE

BRUN LUMIERE 2



WATTS	: 8W
ADJUSTABILITY	: 3500
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 480
LUMENS	: 800Lm
IP RATING	: IP65
UGR	: <16
DIMENSION	: Ø 280 X 85 X H 620 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION

BRUN LUMIERE 3



WATTS	: 8W
ADJUSTABILITY	: 3500
FINISH & MATERIAL	: BROWN & ALUMINIUM
CCT(K)	: 3000K
OPTICS	: 480
LUMENS	: 800Lm
IP RATING	: IP65
UGR	: <16
DIMENSION	: Ø 85 X 30 X H 800 MM
LAMP TYPE	: SMD
POWERED BY	: EDISION

Fundamental of Lighting - Part 4

Powering LEDs The Role of the Driver

An LED driver is an electronic device that converts the incoming electrical supply to the appropriate voltage and current required to power LED lights. This precise regulation is essential for LED longevity and optimal performance.

Constant Current Drivers : Most common for LEDs, providing a fixed output current regardless of voltage fluctuations. This ensures consistent brightness and extends LED lifespan.

Constant Voltage Drivers : Supply a fixed output voltage, often used with LED strips or modules that have built-in current regulation.

Thermal Management The Importance of Heat Sinks

A heat sink is a passive heat exchanger component, typically made of aluminum or copper, designed to dissipate heat generated by LEDs or their drivers. Efficient thermal management is vital for:

Preventing Overheating : High temperatures can severely degrade LED performance and accelerate lumen depreciation.

Extending LED Lifespan : Maintaining optimal operating temperatures significantly increases the operational life of LED components.

Maintaining Performance : Ensures consistent light output, colour stability, and overall efficiency throughout the fixture's life.

PRIME OUTDOOR SERIES



PRODUCT DESCRIPTION		PRODUCT
WATTS	: 8W (OUTDOOR BULKHEAD)	 PRO ELEGANT SMALL
FINISH & MATERIAL	: GRAPHITE GREY & ABS + PC BODY	
CCT(K)	: 3000K, 4000K	
DIFFUSER	: OPAL PC	
DIMENSION	: DIA-190 MM X D-75 MM	
LUMENS	: 520Lm	 PRO ELEGANT MEDIUM
IP RATING	: IP65	
IK RATING	: IK10	
INPUT VOLTAGE	: AC DRIVERLESS	
LAMP TYPE	: SMD 2835 LED	
POWERED BY	: EPISTAR	 PRO ELEGANT BIG
WATTS	: 13W (OUTDOOR BULKHEAD)	
FINISH & MATERIAL	: GRAPHITE GREY & ABS + PC BODY	
CCT(K)	: 3000K, 4000K	
DIFFUSER	: OPAL PC	
DIMENSION	: DIA-245 MM X D-75 MM	 PRO ELEGANT OVAL
LUMENS	: 970Lm	
IP RATING	: IP65	
IK RATING	: IK10	
INPUT VOLTAGE	: AC DRIVERLESS	
LAMP TYPE	: SMD 2835 LED	 PRO CELLAR
POWERED BY	: EPISTAR	
WATTS	: 18W (OUTDOOR BULKHEAD)	
FINISH & MATERIAL	: GRAPHITE GREY & ABS + PC BODY	
CCT(K)	: 3000K, 4000K	
DIFFUSER	: OPAL PC	
DIMENSION	: DIA-310 MM X D-75 MM	 PRO CELLAR
LUMENS	: 1100Lm	
IP RATING	: IP65	
IK RATING	: IK10	
INPUT VOLTAGE	: AC DRIVERLESS	
LAMP TYPE	: SMD 2835 LED	 PRO CELLAR
POWERED BY	: EPISTAR	
WATTS	: 9W (OUTDOOR BULKHEAD)	
FINISH & MATERIAL	: GRAPHITE GREY & ABS + PC BODY	
CCT(K)	: 3000K, 4000K	
DIFFUSER	: OPAL PC	
DIMENSION	: W-245 MM X D-69 MM X H-139 MM	 PRO CELLAR
LUMENS	: 550Lm	
IP RATING	: IP65	
IK RATING	: IK10	
INPUT VOLTAGE	: AC DRIVERLESS	
LAMP TYPE	: SMD 2835 LED	 PRO CELLAR
POWERED BY	: EPISTAR	
WATTS	: 25W	
FINISH & MATERIAL	: PLASTIC BODY	
CCT(K)	: 3000K	
DIFFUSER	: OPAL PC DIFFUSER	
DIMENSION	: DIA 280 X H 60 MM	 PRO CELLAR
LUMENS	: 2000Lm	
IP RATING	: IP65	
POWERED BY	: DRIVER ON BOARD	

PRODUCT DESCRIPTION**PRODUCT**

WATTS	: 8W
FINISH & MATERIAL	: GRAPHITE GREY & ABS + PC BODY
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 45 X H 160MM
LUMENS	: 4000Lm
IP RATING	: IP65
IK RATING	: IK08
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR

**PRO PORCH SMALL**

WATTS	: 14W
FINISH & MATERIAL	: GRAPHITE GREY & ABS + PC BODY
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 50 X H 220MM
LUMENS	: 850Lm
IP RATING	: IP65
IK RATING	: IK08
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR

**PRO PORCH BIG**

WATTS	: GU10 HOLDER
FINISH & MATERIAL	: GRAPHITE GREY ALUMINIUM BODY
DIFFUSER	: GLASS DIFFUSER
DIMENSION	: 88 X 88 X H 92MM
IP RATING	: IP65
POWERED BY	: GU10 NOT INCLUDED

**PRO DROP SQUARE**

WATTS	: GU10 HOLDER
FINISH & MATERIAL	: GRAPHITE GREY ALUMINIUM BODY
DIFFUSER	: GLASS DIFFUSER
DIMENSION	: DIA 90 X H 100MM
IP RATING	: IP65
POWERED BY	: GU10 NOT INCLUDED

**PRO DROP ROUND**

WATTS	: 7W
FINISH & MATERIAL	: BLACK & ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: 60 X H 61 MM
LUMENS	: 700Lm
IP RATING	: IP54
LAMP TYPE	: LED
POWERED BY	: BRIDGELUX

**PRO TIAN 1**

PRODUCT DESCRIPTION

PRODUCT

WATTS : 12W
 FINISH & MATERIAL : BLACK & ALUMINIUM
 CCT(K) : 3000K
 DIMENSION : 75 X H 75 MM
 LUMENS : 1200Lm
 IP RATING : IP65
 LAMP TYPE : LED
 POWERED BY : BRIDGELUX



PRO TIAN 2

WATTS : 18W
 FINISH & MATERIAL : BLACK & ALUMINIUM
 CCT(K) : 3000K
 DIMENSION : 90 X H 90 MM
 LUMENS : 1800Lm
 IP RATING : IP65
 LAMP TYPE : LED
 POWERED BY : BRIDGELUX



PRO TIAN 3

WATTS : 3W
 FINISH & MATERIAL : GRAPHITE BLACK & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 60 X H 16 MM
 LUMENS : 270Lm
 IP RATING : IP54
 LAMP TYPE : COB
 POWERED BY : BRIDGELUX



CLIP

WATTS : 5W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 60 X H 110 MM
 LUMENS : 500Lm
 IP RATING : IP65
 LAMP TYPE : LED
 POWERED BY : CREE



PROP C28

WATTS : 5W (Adjustable)
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 63 x H 170 MM
 LUMENS : 500Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE



PROP C59

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 12W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: 90 X 150 MM
LUMENS	: 1200Lm
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	: CREE



PROP C25

WATTS	: 18W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: Ø 88 x H 235 MM
LUMENS	: 1800Lm
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	: CREE



PROP C60

WATTS	: 8W
FINISH & MATERIAL	: BLACK & ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K
CRI	: ≥80
DIMENSION	: 90 X 46MM
LUMENS	: 720Lm
IP	: IP65



PROP EMY 1

WATTS	: 14W
FINISH & MATERIAL	: BLACK & ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K
CRI	: ≥80
DIMENSION	: 140 X 46MM
LUMENS	: 1260Lm
IP	: IP65



PROP EMY 2

WATTS	: 6W (OUTDOOR WALL LIGHT)
FINISH & MATERIAL	: GRAPHITE GREY & ALU. DIE-CAST
CCT(K)	: 3000K
DIFFUSER	: OPAL PC
DIMENSION	: W 220 MM X D-77 MM X H-90 MM
LUMENS	: 500Lm
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	: CREE



PRO ENERGY SMALL

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 12W (OUTDOOR WALL LIGHT)	
FINISH & MATERIAL	: GRAPHITE GREY & ALU. DIE-CAST	
CCT(K)	: 3000K	
DIFFUSER	: OPAL PC	
DIMENSION	: W 300 MM X D-97 MM X H-120 MM	
LUMENS	: 800Lm	
IP RATING	: IP65	
INPUT VOLTAGE	: AC DRIVERLESS	
LAMP TYPE	: SMD LED	
POWERED BY	: EPISTAR	
WATTS	: 13W	
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTING ALU.	
CCT(K)	: 3000K	
DIFFUSER	: OPAL PC DIFFUSER	
DIMENSION	: 200 X 30 X H 135MM	
LUMENS	: 650Lm	
IP RATING	: IP65	
LAMP TYPE	: COB	
POWERED BY	: EPISTAR	
WATTS	: 10W	
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTING ALU.	
CCT(K)	: 3000K	
DIFFUSER	: OPAL PC DIFFUSER	
DIMENSION	: 200 X 85 X H 135MM	
LUMENS	: 700Lm	
IP RATING	: IP65	
LAMP TYPE	: SMD LED	
POWERED BY	: EPISTAR	

PRO ENERGY BIG

PRO AERO SMALL

PRO AERO BRICK

PRO PORCH IVY

PRO LUCY

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 2 X 5W = 10W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTING ALU.
CCT(K)	: 3000K
DIFFUSER	: PC DIFFUSER
DIMENSION	: 115 X H120MM
LUMENS	: 2 X 400Lm
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	: CREE



PRO ROCK

WATTS	: 12W
SENSOR	: MOVEMENT SENSOR
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTING ALU.
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 165 X 200 X H 153MM
LUMENS	: 900Lm
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR



PRO MOTION

WATTS	: 30W
FINISH & MATERIAL	: GRAPHITE GREY ALUMINIUM BODY
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 264 X 117 X H 308MM
IP RATING	: IP65
POWERED BY	: SMD LED



PRO WOLLARD

WATTS	: 9W SMD LED
FINISH & MATERIAL	: GRAPHITE GREY + ALUMINIUM + PC
CCT(K)	: 3000K
DIMENSION	: H 210 x W 130 x D 103 MM
IP RATING	: IP65



PRO FLINT

WATTS	: 2 x 9W
FINISH & MATERIAL	: GRAPHITE GREY ALUMINIUM BODY
DIFFUSER	: GLASS DIFFUSER
CCT(K)	: 3000K
DIMENSION	: DIA 85 X 83 X H 210MM
IP RATING	: IP65
POWERED BY	: CREE



PRO LEVIS

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 7W
FINISH & MATERIAL	: GRAPHITE GREY & STEEL
CCT(K)	: 3000K
DIFFUSER	: GLASS DIFFUSER
DIMENSION	: 110 X 320 X H 860MM
LUMENS	: 670Lm
IP RATING	: IP54
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR



PRO BOSARO 1

WATTS	: 7W
FINISH & MATERIAL	: GRAPHITE GREY & STEEL
CCT(K)	: 3000K
DIFFUSER	: GLASS DIFFUSER
DIMENSION	: 130 X 320 X H 310MM
LUMENS	: 670Lm
IP RATING	: IP54
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR



PRO BOSARO 2

WATTS	: 12W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALUMINIUM + PC
CCT(K)	: 3000K
DIMENSION	: 160 X 100 X 87 H MM
IP RATING	: IP65
LAMP TYPE	: LED



PROP W48

WATTS	: 6W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: 96 X 153 MM
IP RATING	: IP65
LAMP TYPE	: LED
POWERED BY	: EDISON



PROP W52

WATTS	: 9W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: 165 X 118 MM
IP RATING	: IP65
LAMP TYPE	: LED
POWERED BY	: OSRAM



PROP W53

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 4 x 3W = 12W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: 77 X 77 X H 57 MM
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	: CREE



PROP W33

WATTS	: 2 x 3W = 6W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: 77 X 77 X H 57 MM
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	: CREE



PROP W34

WATTS	: 5W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: 65 X H 100 MM
LUMENS	: 500Lm
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	: CREE



PROP W26

WATTS	: 2 x 5W = 10W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: 65 X 175 MM
LUMENS	: 1000Lm
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	: CREE



PROP W27

WATTS	: 12W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: 90 X H 135 MM
LUMENS	: 1200Lm
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	: CREE



PROP W23

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 2 x 12W = 24W	
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALUMINIUM	
CCT(K)	: 3000K	
DIMENSION	: 90 X H 240 MM	
LUMENS	: 2400Lm	
IP RATING	: IP65	
LAMP TYPE	: COB	
POWERED BY	: CREE	PROP W24
WATTS	: 1 x 12W (350 Degree Rotatable)	
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.	
CCT(K)	: 3000K	
DIMENSION	: 102 x 116 x 150 MM	
LUMENS	: 960Lm	
IP RATING	: IP65	
LAMP TYPE	: SMD	
POWERED BY	: CREE	PROP W57
WATTS	: 2 x 12W (350 Degree Rotatable)	
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.	
CCT(K)	: 3000K	
DIMENSION	: 102 x 217 x 150 MM	
IP RATING	: IP65	
LAMP TYPE	: SMD	
POWERED BY	: CREE	
		PROP W58
WATTS	: 5W	
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTING ALUMINIUM	
CCT(K)	: 3000K	
DIFFUSER	: OPAL PC DIFFUSER	
DIMENSION	: 240 X 37 X H 75MM	
LUMENS	: 300Lm	
IP RATING	: IP65	
LAMP TYPE	: SMD LED	
POWERED BY	: EPISTAR	PRO ENERGY BELLE
WATTS	: 9W	
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTING ALUMINIUM	
CCT(K)	: 3000K	
DIFFUSER	: GLASS DIFFUSER	
DIMENSION	: 262 X 53 X H 55MM	
LUMENS	: 650Lm	
IP RATING	: IP65	
LAMP TYPE	: LED	
POWERED BY	: EPISTAR	PRO BRICK

PRODUCT DESCRIPTION**PRODUCT**

WATTS	: 12W
FINISH & MATERIAL	: GRAPHITE GREY ALUMINIUM BODY
CCT(K)	: 3000K
DIFFUSER	: CLEAR PC DIFFUSER
DIMENSION	: 250 X 90 X H 98 MM
IP RATING	: IP65
POWERED BY	: SMD LED

**PRO PARKER**

WATTS	: 4W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: 90 X 60 MM
LUMENS	: 560Lm
IP RATING	: IP65
LAMP TYPE	: SMD
POWERED BY	: EDISON

**PROP F11**

WATTS	: 8W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: 150 X H 70 MM
IP RATING	: IP65
LAMP TYPE	: SMD
POWERED BY	: EDISON

**PROP F12**

WATTS	: 3W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: 80 x H 75 MM
LUMENS	: 270Lm
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	: CREE

**PROP W21**

WATTS	: 2 x 3W = 6W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: 80 X H 140 MM
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	: CREE

**PROP W22**

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 6W
FINISH & MATERIAL	: BLACK & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: L 80 x W 38 x H 80 MM
LUMENS	: 600Lm
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	: BRIDGELUX



SPREAD

WATTS	: 4W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE CASTED
DIFFUSER	: PC DIFFUSER
CCT(K)	: 3000K
DIMENSION	: 105 x H 105 MM
IP	: IP65



PROP W40

WATTS	: 4W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE CASTED
DIFFUSER	: PC DIFFUSER
CCT(K)	: 3000K
DIMENSION	: DIA 115 MM
IP	: IP65



PROP W41

WATTS	: 3W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: Ø 95 X 60 MM
IP RATING	: IP65
LAMP TYPE	: LED
POWERED BY	: OSRAM



PROP F45

WATTS	: 3W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: 95 X 95 X 60 MM
IP RATING	: IP65
LAMP TYPE	: LED
POWERED BY	: OSRAM



PROP F46

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 5W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: 250 X 45 X 45 H MM
IP RATING	: IP65
LAMP TYPE	: LED
POWERED BY	: CREE



PROP F47

WATTS	: 6W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: 135 x 80 x H 75 MM
IP RATING	: IP65
LAMP TYPE	: SMD



PROP F13

WATTS	: 3W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: 45 x 84 x H 84 MM
IP RATING	: IP65
LAMP TYPE	: SMD



PROP F14

WATTS	: OUTDOOR SPOTLIGHT WITH SPIKE
FINISH & MATERIAL	: GRAPHITE GREY & ABS + PC BODY
DIFFUSER	: CLEAR PC DIFFUSER
DIMENSION	: W 80 MM X D-130 MM X H-113 MM
IP RATING	: IP65
LAMP TYPE	: GU10 LED MAX 6W (LAMP EXCLUDED)



PRO RADIUS

WATTS	: OUTDOOR SPOTLIGHT WITH SPIKE
FINISH & MATERIAL	: GRAPHITE GREY & ALU. DIE-CAST
DIFFUSER	: CLEAR GLASS
DIMENSION	: D 98 x 95 x 59 MM
IP RATING	: IP65
LAMP TYPE	: GU10 MAX 6W (LAMP EXCLUDED)



PRO RISE

PRODUCT DESCRIPTION

PRODUCT

WATTS : GU10 (Not Included)
 FINISH & MATERIAL : BLACK & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : Ø 60 x H 113 MM
 IP RATING : IP65



SPIKE GU10

WATTS : 3W
 FINISH & MATERIAL : GRAPHITE GREY & ALUMINIUM
 CCT(K) : 3000K
 DIMENSION : 45 X 68 X H 160 MM
 LUMENS : 300Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CROM



PRO ORSA 1

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY & ALUMINIUM
 CCT(K) : 3000K
 DIMENSION : 66 X 100 X H 160 MM
 LUMENS : 1200Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CROM



PRO ORSA 2

WATTS : 7W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 91 X 64 X H 186 MM
 LUMENS : 560Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE



PROP S29

WATTS : 12W
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
 CCT(K) : 3000K
 DIMENSION : 95 x 84 x H 186 MM
 LUMENS : 1080Lm
 IP RATING : IP65
 LAMP TYPE : COB
 POWERED BY : CREE



PROP S30



PRODUCT DESCRIPTION		PRODUCT
WATTS	: 12W (OUTDOOR WALL LIGHT)	 PRO ALROUND
FINISH & MATERIAL	: GRAPHITE GREY & ALU. DIE-CAST	
CCT(K)	: 3000K	
DIFFUSER	: CLEAR GLASS	
DIMENSION	: W 160 MM X D-235 MM X H-95 MM	
LUMENS	: 800Lm	 PRO ARISE
IP RATING	: IP65	
LAMP TYPE	: COB	
POWERED BY	: CREE	
WATTS	: 9W	
FINISH & MATERIAL	: GRAPHITE GREY & ALU. DIE-CAST	 PRO VENICE 1
BEAM ANGLE	: ADJUSTABLE BEAM ANGLE (30°-60°)	
CCT(K)	: 3000K	
DIFFUSER	: CLEAR GLASS	
DIMENSION	: W 85 MM X D-154 MM X H-150 MM	
LUMENS	: 800Lm	 PRO VENICE 2
IP RATING	: IP65	
LAMP TYPE	: COB	
POWERED BY	: CREE	
WATTS	: 15W	
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.	 PRO TWIN
BEAM ANGLE	: 15°x 45°	
CCT(K)	: 3000K	
DIMENSION	: W 40 X H 30 X L 500 MM	
IP RATING	: IP67	
LAMP TYPE	: PCB	 PRO TWIN
INPUT	: DC 24V (Driver not Included)	
POWERED BY	: OSRAM	
WATTS	: 30W	
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.	
BEAM ANGLE	: 15°x 45°	 PRO TWIN
CCT(K)	: 3000K	
DIMENSION	: W 40 X H 30 X L 1000 MM	
IP RATING	: IP67	
LAMP TYPE	: PCB	
INPUT	: DC 24V (Driver not Included)	 PRO TWIN
POWERED BY	: OSRAM	
WATTS	: 2 X 1W = 2W (SURFACE MOUNTED GROUND LIGHT)	
FINISH & MATERIAL	: GRAPHITE GREY & ALU. DIE-CAST	
CCT(K)	: 3000K	
DIFFUSER	: CLEAR PC	
DIMENSION	: DIA 210 MM X D-50 MM	 PRO TWIN
IP RATING	: IP67	
IK RATING	: IK10	
MAX WEIGHT	: 2000KG	
POWERED BY	: CREE	

PRODUCT DESCRIPTION**PRODUCT**

WATTS	: 4 X 1W = 4W (SURFACE MOUNTED GROUND LIGHT)
FINISH & MATERIAL	: GRAPHITE GREY & ALU. DIE-CAST
CCT(K)	: 3000K
DIFFUSER	: CLEAR PC
DIMENSION	: DIA 210 MM X D-50 MM
IP RATING	: IP67
IK RATING	: IK10
MAX WEIGHT	: 2000KG
POWERED BY	: CREE

**PRO QUARDO**

WATTS	: 9W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTING ALU.
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 107 X H 140MM
LUMENS	: 720Lm
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR

**PRO POLAR 2**

WATTS	: 9W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTING ALU.
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 107 X H 400MM
LUMENS	: 720Lm
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR

**PRO POLAR 3**

WATTS	: 9W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTING ALU.
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 107 X H 600MM
LUMENS	: 720Lm
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR

**PRO POLAR 4**

WATTS	: 5W
FINISH & MATERIAL	: BLACK & DIE CASTING ALUMINIUM
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 200 X 140 X H 50 MM
LUMENS	: 500Lm
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR

**PRO POLISH 1**

PRODUCT DESCRIPTION		PRODUCT
WATTS	: 5W	 PRO POLISH 2
FINISH & MATERIAL	: BLACK & DIE CASTING ALUMINIUM	
CCT(K)	: 3000K	
DIFFUSER	: OPAL PC DIFFUSER	
DIMENSION	: 200 X H 800 X 50 MM	
LUMENS	: 500Lm	
IP RATING	: IP65	
LAMP TYPE	: SMD LED	 PRO TRONO 1
POWERED BY	: EPISTAR	
WATTS	: 12W	
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTING ALU.	
CCT(K)	: 3000K	
DIFFUSER	: OPAL PC DIFFUSER	
DIMENSION	: 100 X 100 X H 150MM	
LUMENS	: 600Lm	 PRO TRONO 2
IP RATING	: IP65	
LAMP TYPE	: SMD LED	
POWERED BY	: EPISTAR	
WATTS	: 12W	
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTING ALU.	
CCT(K)	: 3000K	
DIFFUSER	: OPAL PC DIFFUSER	 PRO TRONO 3
DIMENSION	: 100 X 100 X H 500MM	
LUMENS	: 600Lm	
IP RATING	: IP65	
LAMP TYPE	: SMD LED	
POWERED BY	: EPISTAR	
WATTS	: 6W	 PRO PATH
FINISH & MATERIAL	: GRAPHITE GREY ALUMINIUM BODY	
DIFFUSER	: OPAL PC DIFFUSER	
CCT(K)	: 3000K	
DIMENSION	: 100 X 50 X H 250MM	
IP RATING	: IP65	
POWERED BY	: SMD 2835	

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 2 X 5W = 10W
FINISH & MATERIAL	: BLACK & DIE CASTING ALU.
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 110 X 60 X H 340 MM
LUMENS	: 1100Lm
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR



PRO POT 1

WATTS	: 2 X 5W = 10W
FINISH & MATERIAL	: BLACK & DIE CASTING ALU.
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 110 X 60 X H 770 MM
LUMENS	: 1100Lm
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR



PRO POT 2

WATTS	: 12W SMD LED (SPIKE LIGHT)
FINISH & MATERIAL	: GRAPHITE GREY & ALU. + PC
CCT(K)	: 3000K
DIMENSION	: H 500 X W 110 X 18 MM (SPIKE 200 MM)
IP RATING	: IP65
POWERED BY	: CREE
WIRE	: 1 MTR. CABLE



PRO CHARCOAL

WATTS	: 3W
FINISH & MATERIAL	: BLACK & DIE CASTING ALU.
CCT(K)	: 3000K
DIMENSION	: 120 X H 240 MM
LUMENS	: 270Lm
IP RATING	: IP65
POWERED BY	: OSRAM



PRO CUBO 1

WATTS	: E27 HOLDER
FINISH & MATERIAL	: BLACK & ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: 200 X W 200 X H 335 MM
IP RATING	: IP65
POWERED BY	: LAMP NOT INCLUDED



PRO PYRAMID 1

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 12W
FINISH & MATERIAL : BLACK & DIE CASTING ALU.
CCT(K) : 3000K
DIMENSION : 103 X H 350 MM
IP RATING : IP65
POWERED BY : EPISTAR

**PRO AQUA 1**

WATTS : 12W
FINISH & MATERIAL : BLACK & DIE CASTING ALU.
CCT(K) : 3000K
DIMENSION : 103 X H 600 MM
IP RATING : IP65
POWERED BY : EPISTAR

**PRO AQUA 2**

WATTS : 5W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : Ø 89 x 90 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP W64**

WATTS : 5W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 500 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP B65**

WATTS : 12W + 2W (Switch Changing)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 500 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP B66**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 12W
FINISH : GRAPHITE GREY
MATERIAL : ALUMINIUM DIE CASTED
CCT(K) : 3000K
DIMENSION : 45 x H 180 MM
IP : IP65
POWERED BY : EDISON

**PROP W36**

WATTS : 12W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 190 X 160 MM
LUMENS : 960Lm
IP RATING : IP65
LAMP TYPE : LED
POWERED BY : EDISON

**PROP W20**

WATTS : 12W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 180 X 500MM
LUMENS : 960Lm
IP RATING : IP65
LAMP TYPE : LED
POWERED BY : EDISON

**PROP B19**

WATTS : 12W
FINISH : GRAPHITE GREY
MATERIAL : ALUMINIUM DIE CASTED
DIFFUSER : PC DIFFUSER
CCT(K) : 3000K
DIMENSION : 105 x H 290 MM
IP : IP65

**PROP W37**

WATTS : 12W
FINISH : GRAPHITE GREY
MATERIAL : ALUMINIUM DIE CASTED
DIFFUSER : PC DIFFUSER
CCT(K) : 3000K
DIMENSION : 105 x H 305 MM
IP : IP65

**PROP G38**

PRODUCT DESCRIPTION

PRODUCT

WATTS	: 12W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE CASTED
DIFFUSER	: PC DIFFUSER
CCT(K)	: 3000K
DIMENSION	: 105 x H 500 MM
IP	: IP65



PROP B39

WATTS	: 12W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE CASTED
CCT(K)	: 3000K
DIMENSION	: D 140 x H 254 MM
IP	: IP65
POWERED BY	: CREE



PROP B49

WATTS	: 12W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE CASTED
CCT(K)	: 3000K
DIMENSION	: D 140 x H 508 MM
IP	: IP65
POWERED BY	: CREE



PROP B50

WATTS	: 12W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE CASTED
CCT(K)	: 3000K
DIMENSION	: D 140 x H 762 MM
IP	: IP65
POWERED BY	: CREE



PROP B51

WATTS	: 12W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: 254 MM
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	: CREE



PROP B67

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 12W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 508 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP B68**

WATTS : 12W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 254 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP B69**

WATTS : 12W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 508 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP B70**

WATTS : 12W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 254 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP B71**

WATTS : 12W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 508 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE


**PROP B72**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : 5W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 762 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP B73**

WATTS : 2 x 5W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : 762 MM
IP RATING : IP65
LAMP TYPE : COB
POWERED BY : CREE

**PROP B74**

WATTS : 12W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : H 330 MM
IP RATING : IP65
LAMP TYPE : SMD
POWERED BY : BRIDGELUX

**PROP W75**

WATTS : 12W
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : H 510 MM
IP RATING : IP65
LAMP TYPE : SMD
POWERED BY : BRIDGELUX

**PROP B76**

WATTS : E-27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 180 x 760 MM
IP RATING : IP54

**PROP B15**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : E27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 180 X 500 MM
IP RATING : IP65

**PROP B16**

WATTS : E-27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 180 x 230 MM
IP RATING : IP65

**PROP G17**

WATTS : E-27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 180 x 230 MM
IP RATING : IP65

**PROP W18**

WATTS : E-27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 210 x H 205 MM
IP RATING : IP65

**PROP G42**

WATTS : E27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
CCT(K) : 3000K
DIMENSION : Ø 210 x H 205 MM
IP RATING : IP65

**PROP W61**

PRODUCT DESCRIPTION**PRODUCT**

WATTS : E27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 215 X H 200 MM
IP RATING : IP65

**PROP G43**

WATTS : E27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : Ø 215 x H 500 MM
IP RATING : IP65

**PROP B62**

WATTS : E27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : Ø 215 x H 200 MM
IP RATING : IP65

**PROP W63**

WATTS : E27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 254 X H 254 MM
IP RATING : IP65

**PROP G44**

WATTS : E-27 (Lamp not Included)
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.
DIMENSION : 153 x H 153 MM
IP RATING : IP65

**PROP G54**

PRODUCT DESCRIPTION**PRODUCT**

WATT	: 20W
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIAMENTION	: 2 FT. × D 75 MM
IP RATING	: IP65
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	: BRIDGELUX

**PRO ENTICER 1**

WATT	: 35W
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIAMENTION	: 4 FT. × D 75 MM
IP RATING	: IP65
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	: BRIDGELUX

**PRO ENTICER 2**

WATT	: 50W
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIAMENTION	: 8 FT. × D 75 MM
IP RATING	: IP65
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	: BRIDGELUX

**PRO ENTICER 3**

WATT	: 50W
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIAMENTION	: D 395 MM × H 275 MM
IP RATING	: IP65
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	: BRIDGELUX

**PRO POST TOP 1**

WATT	: 50W
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIAMENTION	: D 395 MM × H 65 MM
IP RATING	: IP65
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	: BRIDGELUX

**PRO POST TOP 2**

PRODUCT DESCRIPTION**PRODUCT**

WATT	: 2 X 50W
MATERIAL	: PC DIFFUSER + DIE CAST ALU.
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIAMENTION	: L 920 MM × H 65 MM
IP RATING	: IP54
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	: BRIDGELUX

**PRO POST TOP 3**

ONLY POLE	
MATERIAL	: DIE CAST ALUMINUM
FINISH	: GRAPHITE GREY
DIAMENTION	: HEIGHT 10 FT. X D 75 MM

**PRO POLE 1**

WATTS	: 7W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: 85 X 90 MM
LUMENS	: 560Lm
IP RATING	: IP54
LAMP TYPE	: COB
POWERED BY	: CREE

**PROP U31**

WATTS	: 12W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTED ALU.
CCT(K)	: 3000K
DIMENSION	: 110 X H 100 MM
LUMENS	: 960Lm
IP RATING	: IP54
LAMP TYPE	: COB
POWERED BY	: CREE

**PROP U32**

PRISHA-TECH



PIXELLUX

Controllable

On / Off
 Tunable
 0 - 10V
 Dali
 DMX 512
 Casambi



SDCM - Optional

2 Step / 3 Step

Life Time

> 50,000h


Colour Rendering Index - Optional

90 95 98


Beam Angle



Color Temperature [CCT]



Lamp Cup Colour



Finishing



Fabrication Method

Precision Machined Parts



SPECIFICATIONS

Model No.	PIXELLUX
Input Voltage	AC 220V
Power	8W 15W
Material	Aluminum
Lamp Size	8W - Ø52*H108mm (Cutout: Ø45)
	15W - Ø72*H113mm (Cutout: Ø65)
Led Type	COB
Led Brand	Citizen
Driver Brand	Eaglerise / Tridonic (Optional)

(Note: Front Openable)

INSETA

Controllable

On / Off
Tunable
0 - 10V
DALI
DMX S12
Casambi



SDCM - Optional

2 Step / 3 Step

Life Time

> 50,000h

Colour Rendering Index - Optional


90 95 98



Beam Angle



Color Temperature [CCT]



Lamp Cup Colour

- Gun Black
- Chrome
- Matt Silver
- White

Finishing

- ☐ Matt White
- ☒ Matt Black

Fabrication Method

Precision Machined Parts

SPECIFICATIONS

Model No.	INSETA
Input Voltage	AC 220V
Power	12W 18W 25W 35W
Material	Aluminum
Lamp Size	12W - $\Phi 84 \times H63.5$ mm Cutout: $\Phi 75$ mm 18W - $\Phi 106 \times H68$ mm Cutout: $\Phi 95$ mm 25W - $\Phi 140 \times H81$ mm Cutout: $\Phi 125$ mm 35W - $\Phi 170 \times H81$ mm Cutout: $\Phi 145$ mm
Led Type	COB
Led Brand	Citizen
Driver Brand	Eaglerise / Tridonic (Optional)

CORTIVA

Controllable

On / Off
Tunable
0 - 10V
Dali
DMX 512
Casambi



SDCM - Optional

2 Step / 3 Step

Life Time

> 50,000h

Colour Rendering Index - Optional

90 95 98



Beam Angle



15°



24°




36°



60°

Color Temperature [CCT]



Lamp Cup Colour



Matt Black



Matt White

Finishing



Matt White



Matt Black

Fabrication Method

Precision Machined Parts

SPECIFICATIONS

Model No.	CORTIVA
Input Voltage	AC 220V
Power	8W 15W 25W 35W
Cutting Hole Cut	NA
Material	Aluminum
Lamp Size	8W - $\Phi 70 \times H110\text{mm}$
	15W - $\Phi 90 \times H140\text{mm}$
	25W - $\Phi 105 \times H150\text{mm}$
	35W - $\Phi 115 \times H160\text{mm}$
Led Type	COB
Led Brand	Citizen
Driver Brand	Eaglerise / Tridonic (Optional)

LUXBLADE

Controllable

On / Off
Tunable
0 - 10V
Dali
DMX 512
Casambi




SDCM - Optional

2 Step / 3 Step

Life Time

> 50,000h



Colour Rendering Index - Optional


90 95 98



Beam Angle



Color Temperature [CCT]



Lamp Cup Colour

- Gun Black
- Chrome
- Matt Silver
- White

Finishing

- ☐ Matt White
- ☒ Matt Black

Fabrication Method

Precision Casting

SPECIFICATIONS

Model No.	LUXBLADE
Input Voltage	AC 220V
Power	5*2W 10*2W
Material	Aluminum
Lamp Size	5*2W - 147*45*H52mm (Cutout: 138*37)
	10*2W - 280*45*H52mm (Cutout: 275*37)
Led Type	SMD
Led Brand	Bridgelux
Driver Brand	Eaglerise / Tridonic (Optional)



RETAILUX

Controllable

On / Off
 Tunable
 0 - 10V
 Dali
 DMX S12
 Casambi



SDCM - Optional

2 Step / 3 Step

Life Time

> 50,000h


Colour Rendering Index - Optional

90 95 98

Beam Angle



Color Temperature [CCT]




Finishing

- ☐ Matt White
☒ Matt Black

Fabrication Method

Precision Machined Parts



SPECIFICATIONS

Model No.	RETAILUX
Input Voltage	AC 220V
Power	20W
Material	Aluminum
Lamp Size	20W - $\Phi 92.5 \times H100$ mm Cutout: $\Phi 90$
Led Type	COB
Led Brand	Citizen
Driver Brand	Eaglerise / Tridonic (Optional)

TRAXLINE

Controllable

On / Off
Tunable
0 - 10V
Dali
DMX 512
Casambi



SDCM - Optional


2 Step / 3 Step

Life Time


> 50,000h

Colour Rendering Index - Optional


90 95 98

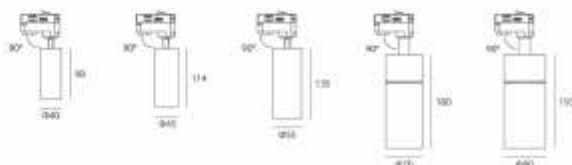

Beam Angle



Color Temperature [CCT]



Lamp Cup Colour

- Gun Black
- Chrome
- Matt Silver
- White

Finishing

- ☐ Matt White
- ☒ Matt Black

Fabrication Method

Precision Machined Parts

SPECIFICATIONS

Model No.	TRAXLINE
Input Voltage	AC 220V
Power	10W 15W 20W 25W 35W
Mounting	Track Mount
Material	Aluminum
Lamp Size	10W - Ø40*H98mm
	15W - Ø45*H114mm
	20W - Ø55*H135mm
	25W - Ø70*H180mm
	35W - Ø80*H193mm
Led Type	COB
Led Brand	Citizen
Driver Brand	Eaglerise / Tridonic (Optional)



FLEXLUX

Controllable

On / Off
0 - 10V
Dali
DMX 512
Casambi



SDCM

2 Step / 3 Step


Life Time

> 50,000h


Colour Rendering Index

90 95 98


Beam Angle



Color Temperature [CCT]



Lamp Cup Colour




Finishing



Fabrication Method

Precision Machined Parts

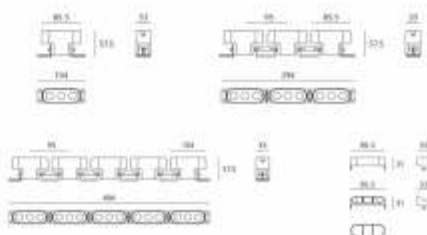

SPECIFICATIONS

Model No.	FLEXLUX
Input Voltage	DC 24V
Power	5W 3*5W 5*5W
Cutting Hole Cut	NA
Material	Aluminum
Lamp Size	5W - 104*33*H57.5mm 3*5W - 294*33*H57.5mm 5*5W - 484*33*H57.5mm
Led Type	SMD
Led Brand	Bridgelux
Driver Brand	24V Driver Extra



SPYDOT

Controllable

On / Off
0 - 10V
Dali
DMX 512
Casambi



SDCM


2 Step / 3 Step

Life Time

> 50,000h

Colour Rendering Index


90 95 98



Beam Angle



Color Temperature [CCT]



Lamp Cup Colour



Matt Black



Matt White

Finishing

☐ Matt White

☒ Matt Black

Fabrication Method

Precision Machined Parts



SPECIFICATIONS

Model No.	SPYDOT
Input Voltage	DC 24V
Power	5W 8W 12W
Cutting Hole Cut	NA
Material	Aluminum
Lamp Size	5W - Ø34*50*H57mm
	8W - Ø54*70*H77mm
	12W - Ø84*88*H117mm
Led Type	COB
Led Brand	Citizen
Driver Brand	24V Driver Extra

AXILUX

Controllable

On / Off
0 - 10V
Dali
DMX 512
Casambi



SDCM

2 Step / 3 Step




Life Time

50,000h


Colour Rendering Index

90 95 98

Beam Angle



Color Temperature [CCT]



Lamp Cup Colour

☒ Matt Black
☐ Matt White

Finishing

☐ Matt White
☒ Matt Black
☐ As per Image

Fabrication Method

Precision Machined Parts

SPECIFICATIONS

Model No.	AXILUX
Input Voltage	AC 220V
Power	6W 15W 25W
Material	Aluminum
Lamp Size	6W - 65*50*186mm
	15W - 95*65*236mm
	25W - 135*65*251mm
Led Type	SMD
Led Brand	Bridgelux

WALLVO



SPECIFICATIONS

Product Code	WALLVO	
LED Brand	OSRAM (SMD)	OSRAM RGBW (SMD)
Rated Power	25W (12 PCS) / 48W (24 PCS)	48W (12 PCS) / 72W (24 PCS)
Input Voltage	AC 100 - 277V / DC24V	DC24V
Frequency Range	50 / 60Hz	50 / 60Hz
Colour	3000k (On Request Available - 2700k, 4000k, 6500k)	RGBW (3000K / 4000K / 6500K)
Beam Angle	2.5° 5° 15° 25° 35° 45° 60°	12° 25° 45° 60°
Control Mode	On / Off	DMX512
Life	50000H	50000H
Protection Grade	Ip65	Ip65
Ambient Temperature	-20° C - +45°C	-20° C - +45°C



SMD



OPTICAL CONTROLLING ACCESSORIES



WALLVO

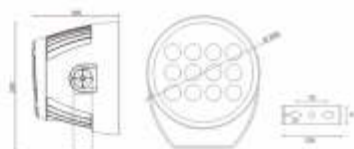

SPECIFICATIONS

Product Code	WALLVO	
LED Brand	OSRAM (SMD)	OSRAM RGBW (SMD)
Rated Power	100W (48 PCS) / 250W (108 x 2W)	150W (48 PCS) / 350W (36 x 10W)
Input Voltage	AC 100 - 277V / DC24V	DC24V
Frequency Range	50 / 60Hz	50 / 60Hz
Colour	3000k (On Request Available - 2700k, 4000k, 6500k)	RGBW (3000K/4000K/6500K)
Beam Angle	2.5° 15° 25° 35° 45° 60°	12° 25° 45° 60°
Control Mode	On / Off	DMX512
Life	50000H	50000H
Protection Grade	Ip65	Ip65
Ambient Temperature	-20° C - +45°C	-20° C - +45°C

SMD




OPTICAL CONTROLLING ACCESSORIES






4WARD


4WARD - 15W



4WARD - 25W



4WARD - 45W



Wall Mounting




SPECIFICATIONS

Product Code	4WARD		
LED Brand	CREE (COB)	CREE (COB)	CREE (COB)
Rated Power	15W (1 * 15W)	25W (2 * 10W)	45W (4 * 10W)
Input Voltage	AC 100 - 277V	AC 100 - 277V	AC 100 - 277V
Frequency Range	50 / 60Hz	50 / 60Hz	50 / 60Hz
Colour	3000K	3000K	3000K
Beam Angle	45° * 90°	45° * 90°	45° * 90°
Control Mode	On / Off	On / Off	On / Off
Life	50000H	50000H	50000H
Protection Grade	Ip65	Ip65	Ip65
Ambient Temperature	-20° C - +45°C	-20° C - +45°C	-20° C - +45°C

(LED colour also available on request 2700K, 4000K, 6500K)


BINOCS



SPECIFICATIONS

Product Code	BINOCS	
LED Brand	CREE (SMD)	CREE (COB)
Rated Power	120W (54 PCS)	160W (3 PCS)
Input Voltage	AC 100 - 277V	AC 100 - 277V
Frequency Range	50 / 60Hz	/
Colour	3000K (On Request Available - 2700k, 4000k, 6500k)	RGBW (3000K/4000K/6500K)
Beam Angle	5° 15° 25° 30° 45° 60°	15° 24° 38°
Control Mode	On / Off	On / Off
Life	50000H	50000H
Protection Grade	Ip65	Ip65
Ambient Temperature	-20° C - +45°C	-20° C - +45°C

SMD




OPTICAL CONTROLLING ACCESSORIES



WINLINE

XH-31107B



XH-31107A




SPECIFICATIONS

Product Code	WINLINE	
LED Brand	OSRAM (SMD)	OSRAM (SMD)
Rated Power	6 W (3 PCS)	12 W (6 PCS)
Input Voltage	AC 100 - 277V	AC 100 - 277V
Frequency Range	50 / 60Hz	50 / 60Hz
Colour	3000k (On Request Available - 2700k, 4000k, 6500k)	3000k (On Request - 2700k, 4000k, 6500k)
Beam Angle	5 * 99°	5 * 160°
Control Mode	On / Off	On / Off
Life	50000H	50000H
Protection Grade	Ip65	Ip65
Ambient Temperature	-20° C - +45°C	-20° C - +45°C



LUMIROD

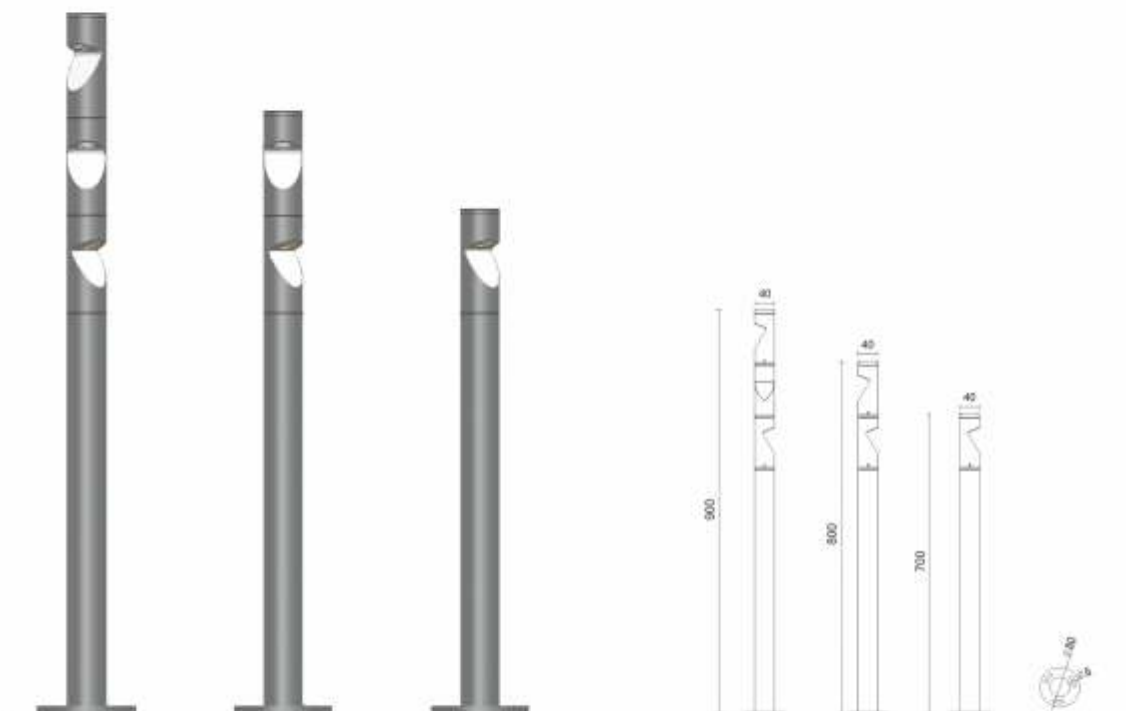

SPECIFICATIONS

Product Code	LUMIROD
LED Brand	CREE
Rated Power	3W (1 * 3W) 6W (2 * 3W) 9W (3 * 3W)
Input Voltage	AC 100 - 277V
Frequency Range	50Hz / 60Hz
Colour	3000K (On Request Available - 2700k, 4000k, 6500k)
Beam Angle	90°
Control Mode	On / Off
Life	50000H
Protection Grade	Ip65
Ambient Temperature	-20° C - +45°C



WATTS : 5W
CCT(K) : 3000K
BEAM ANGLE : 15°/38°/60°
DIMENSION : 50 X H 123 MM
IP RATING : IP66
IK RATING : IK06
POWERED BY : CREE



1W
3W
5W
12W
24W



WATTS : 9W
CCT(K) : 3000K
BEAM ANGLE : 15°/38°/60°
DIMENSION : 64 X H 146 MM
IP RATING : IP66
IK RATING : IK06
POWERED BY : CREE



WATTS : 15W
CCT(K) : 3000K
BEAM ANGLE : 15°/38°/60°
DIMENSION : 77 X H 176 MM
IP RATING : IP66
IK RATING : IK06
POWERED BY : CREE



“Our History
is similar to a tree:
Solid values
anchored in the Roots,
continuous Evolution
from the leaves,
but always
searching for the Light.”

GENERAL TERMS & CONDITIONS

- PRICES ARE IN INDIAN RUPEES.
- ALL PRICES ARE SUBJECT TO LIGHT INSIDE GENERAL TERMS & CONDITIONS OF BUSINESS.
- GOODS ARE DESPATCHED BY US ON PURCHASER'S RISK. ALL CLAIMS FOR LOSS, DAMAGE OR SHORTAGE WILL BE FILLED BY THE PURCHASERS DIRECTLY WITH THE CARRIERS.
- DESIGN CHANGES IS ROUTINE PRACTICE AT PRISHA ILLUMINATION FOR BETTER IMPROVEMENT DATA PROVIDED MAY CHANGE WITHOUT ANY PRIOR INTIMATION. CUSTOMERS ARE ADVISED TO RECONFIRM THE DATA OR PRODUCTS DIMENSIONS BEFORE PURCHASE.
- PRICES ARE SUBJECTS TO CHANGE WITHOUT ANY PRIOR INTIMATION.
- ORDERS SHOULD BE PLACED AGAINST THE CONFIRMED PURCHASE ORDER ONLY.
- WARRANTY BECOMES VOID IF THE PRODUCT IS IMPROPERLY APPLIED AND IF THE DAMAGE IS CAUSED BY IMPROPER USE OR INSTALLATION.
- FUNDAMENTAL FAILURE'S THAT WILL NOT BE CONSIDERED FOR WARRANTY, PHYSICAL DAMAGE OF ANY COMPONENTS OR PRODUCT , DUE TO IMPROPER HANDLING.
- COLOUR OF THE PRODUCT IN PHOTO MAY VARY FROM THE ACTUAL PRODUCT.
- DISPUTES, IF ANY ARE SUBJECT TO AHMEDABAD JURIDICITION ONLY.
- ALL DEALERS / CUSTOMERS ARE ADVISED TO TAKE MATERIAL/ORDER AFTER APPROVING PHYSICAL SAMPLE. DIMENSIONS AND CUT OUT AS MENTIONED IN PRICE LIST MAY VARY FROM ACTUAL PRODUCT AS PER LOT TO LOT. FURTHER NO CLAIM WE WILL BE ENTERTAINED BY COMPANY.

Marketed by :

LIGHT | *INSIDE* PVT LTD

FF-1/2, Maruti Arcade, Shivranjani Cross Road, Satellite, Ahmedabad-380 015.
Gujarat. India. Cell : +91 96879 71231 +91 98254 31492
E-mail : prishaillumination@lightinside.in • dhaval@prishaillumination.com
Website : www.prishaillumination.com



For more details

BIZ SERIES

Built for Bulk. Designed for Business

By

PRISHA
ILLUMINATION



ZST

Series

PRISHA
ILLUMINATION



PRODUCT CODE	WATT	BODY COLOUR	DIMENSION	CUTOUT
ZST 01	12W	WHITE / BLACK	D115 × H45	95
ZST 02	18W	WHITE / BLACK	D145 × H45	135
ZST 03	24W	WHITE / BLACK	D165 × H45	155

ZOR

Series

PRISHA
ILLUMINATION



PRODUCT CODE	WATT	BODY COLOUR	DIMENSION	CUTOUT
ZOR 01	7W	WHITE / BLACK	D63 × H60	55
ZOR 02	12W	WHITE / BLACK	D84 × H61	75
ZOR 03	18W	WHITE / BLACK	D90 × H87	80

ZPL

Series

PRISHA
ILLUMINATION



PRODUCT CODE	WATT	REFLECTOR COLOUR	DIMENSION	CUTOUT
ZPL 01	7W	WHITE / BLACK / TITANIUM BLACK / ROSE GOLD	D73 × H65	65
ZPL 02	12W	WHITE / BLACK / TITANIUM BLACK / ROSE GOLD	D83 × H73	75
ZPL 03	18W	WHITE / BLACK / TITANIUM BLACK / ROSE GOLD	D93 × H82	85

ZKO

Series

PRISHA
ILLUMINATION




PRODUCT CODE	WATT	BODY COLOUR	REFLECTOR COLOUR	DIMENSION	CUTOUT
ZKO 01	7W	WHITE / BLACK	TITANIUM BLACK / ROSE GOLD	D75 × H54	65
ZKO 02	12W	WHITE / BLACK	TITANIUM BLACK / ROSE GOLD	D85 × H62	75
ZKO 03	18W	WHITE / BLACK	TITANIUM BLACK / ROSE GOLD	D93 × H71	85

ZCR

Series

PRISHA
ILLUMINATION

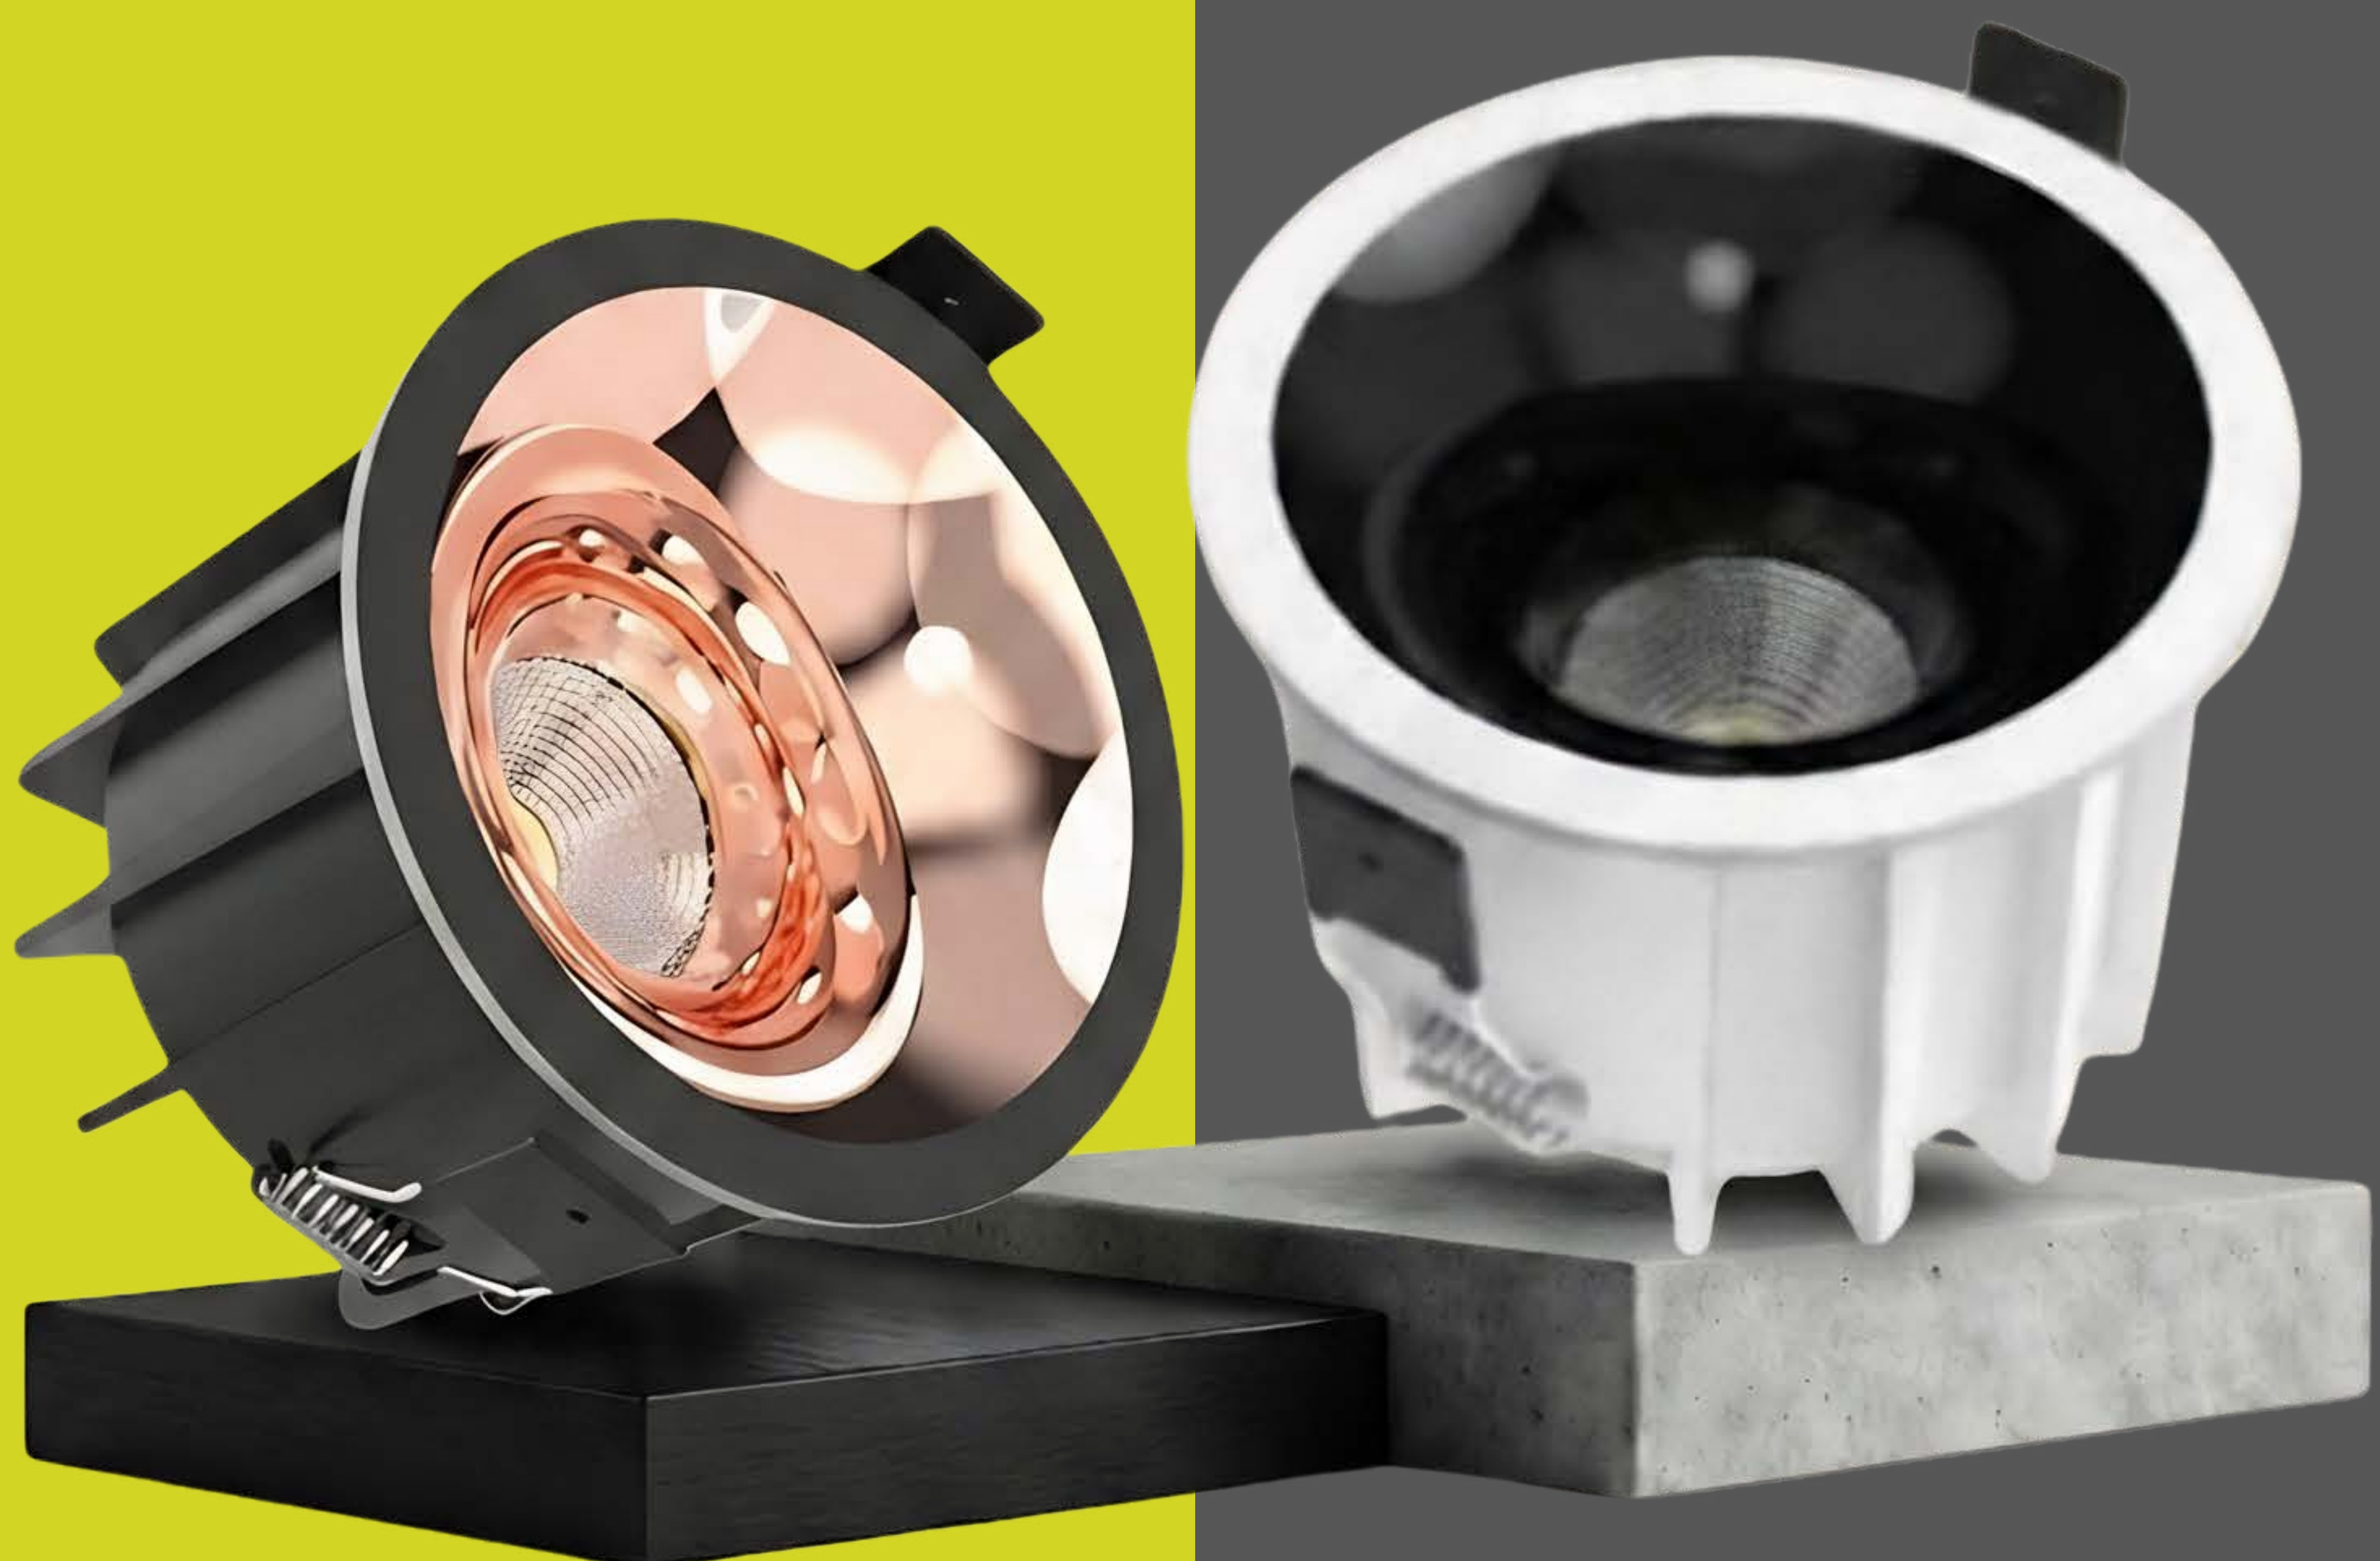

PRODUCT CODE	WATT	BODY COLOUR	REFLECTOR COLOUR	DIMENSION	CUTOUT
ZCR 01	7W	WHITE / BLACK	TITANIUM BLACK / ROSE GOLD	D73 × H58	65
ZCR 02	12W	WHITE / BLACK	TITANIUM BLACK / ROSE GOLD	D83 × H65	75
ZCR 03	18W	WHITE / BLACK	TITANIUM BLACK / ROSE GOLD	D93 × H72	85

ZSF

Series

PRISHA
ILLUMINATION



PRODUCT CODE	WATT	BODY COLOUR	REFLECTOR COLOUR	DIMENSION	CUTOUT
ZSF 01	7W	WHITE / BLACK	TITANIUM BLACK / ROSE GOLD	D64 × H70	-
ZSF 02	12W	WHITE / BLACK	TITANIUM BLACK / ROSE GOLD	D73 × H85	-
ZSF 03	18W	WHITE / BLACK	TITANIUM BLACK / ROSE GOLD	D84 × H100	-

ZGL

Series

PRISHA
ILLUMINATION



PRODUCT CODE	WATT	BODY COLOUR	DIMENSION	CUTOUT
ZGL 01	3W	WHITE / BLACK	D63 × H39	55
ZGL 02	7W	WHITE / BLACK	D87.5 × H52	75
ZGL 03	12W	WHITE / BLACK	D87.5 × H62	75
ZGL 04	18W	WHITE / BLACK	D113.5 × H70	100
ZGL 05	24W	WHITE / BLACK	D134.5 × H77	125
ZGL 06	30W	WHITE / BLACK	D160 × H90	145

ZTL


Series

PRISHA
ILLUMINATION



PRODUCT CODE	WATT	BODY COLOUR	DIMENSION	CUTOUT
ZTL 01	12W	WHITE / BLACK	D50 × H100	-
ZTL 02	18W	WHITE / BLACK	D60 × H140	-
ZTL 03	30W	WHITE / BLACK	D80 × H160	-

www.prishaillumination.com

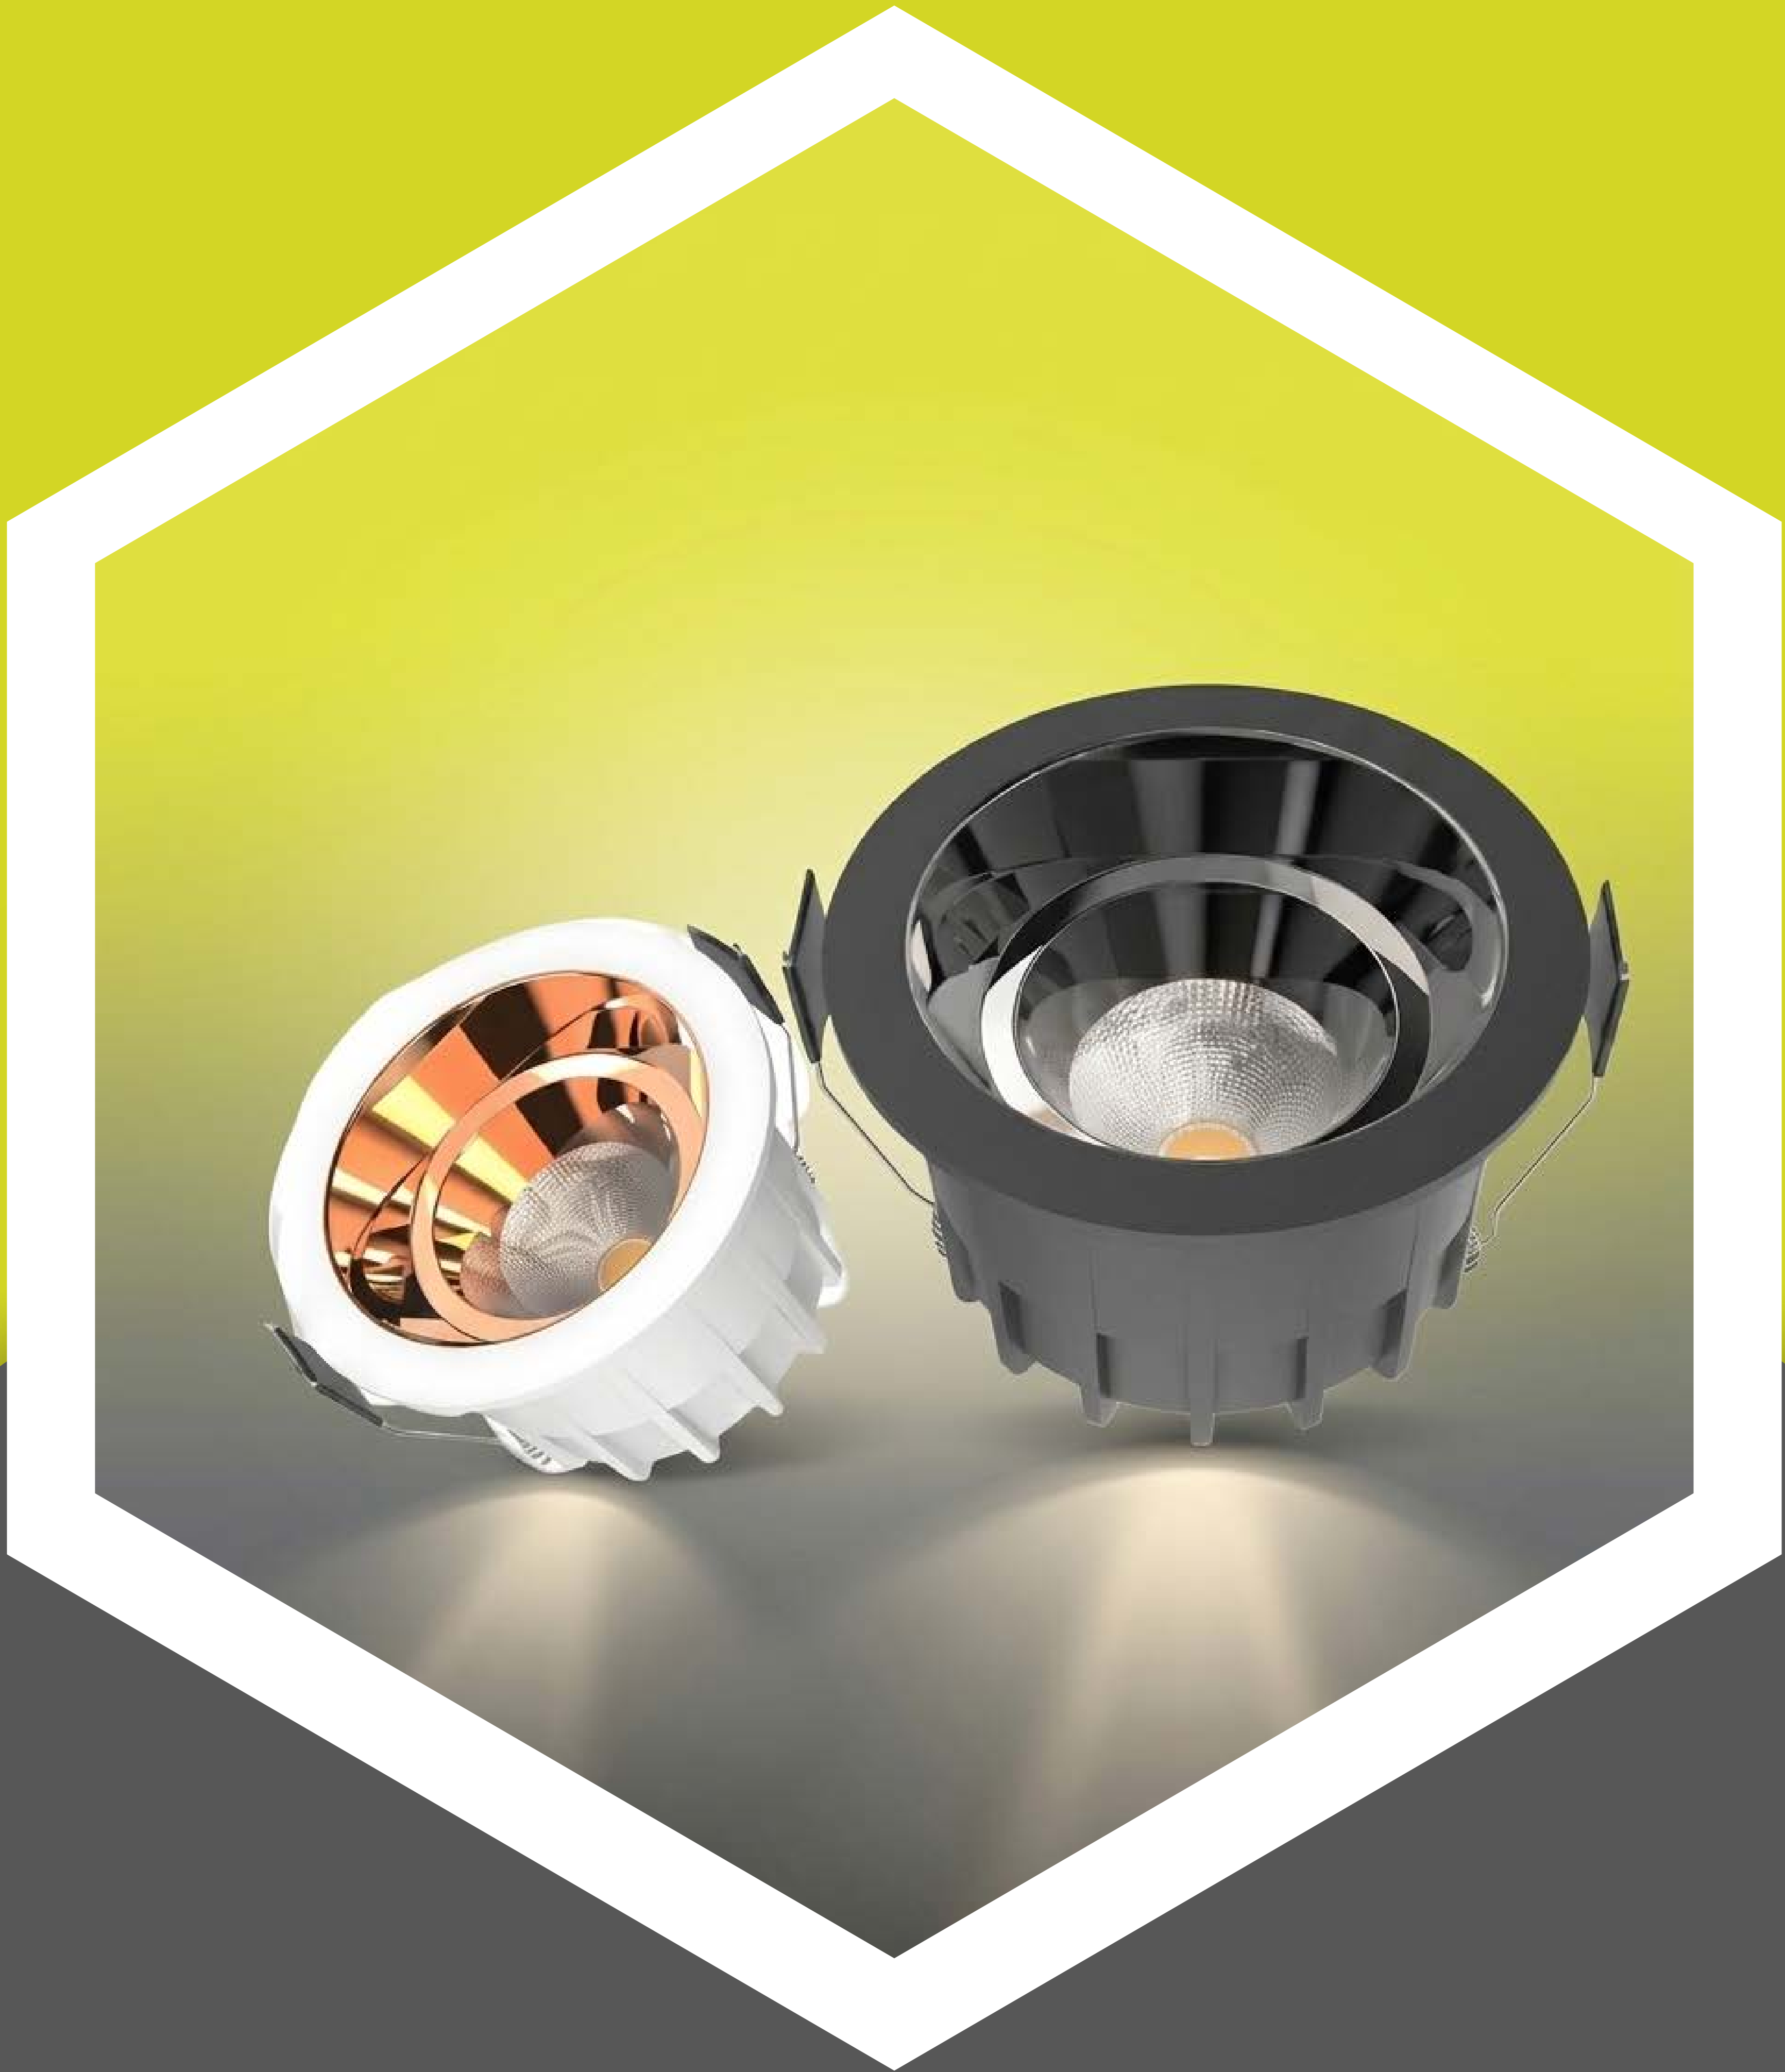

Marketed by:
LIGHT INSIDE PVT. LTD.

Address: FF-5 Maruti arcade, Near- Shivaranjani Cross
Roads, 132 FT Ring Road, Satellite,
Ahmedabad-380015.

 **+91 9687971231**

 **prishaillumination@lightinside.in**